



Failure Modes, Effects and Diagnostic Analysis

Project:
8800C Vortex Flowmeter

Customer:
Rosemount Inc.
Chanhassen, MN
USA

Contract No.: ROS 02/07-14
Report No.: ROS 02/07-14 R001
Version V2, Revision R1.0, September 2003
William M. Goble – John C. Grebe

Management summary

This report summarizes the results of the Failure Modes, Effects, and Diagnostic Analysis (FMEDA) of the 8800C Vortex Flowmeter. A Failure Modes, Effects, and Diagnostic Analysis is one of the steps to be taken to achieve functional safety certification per IEC 61508 of a device. From the FMEDA, failure rates and Safe Failure Fraction are determined. The FMEDA that is described in this report concerns only the hardware of the PRODUCT, electronic and mechanical. For full functional safety certification purposes all requirements of IEC 61508 must be considered.

The 8800C Vortex Flowmeter is a 4 – 20 mA smart device. It contains self-diagnostics and is programmed to send it's output to a specified failure state, either high or low upon internal detection of a failure.

The 8800C Vortex Flowmeter is classified as a Type B¹ device according to IEC61508, having a hardware fault tolerance of 0. The analysis shows that the device has a safe failure fraction between 60 and 90% (assuming that the logic solver is programmed to detect over-scale and under-scale currents) and therefore may be used up to SIL 1 as a single device.

The failure rates for the 8800C Vortex Flowmeter are as follows:

$$\lambda^H = 75 * 10^{-9} \text{ failures per hour}$$

$$\lambda^L = 352 * 10^{-9} \text{ failures per hour}$$

$$\lambda^{DU} = 296 * 10^{-9} \text{ failures per hour}$$

Table 1 lists the failure rates for 8800C Vortex Flowmeter according to IEC 61508, assuming that the logic solver can detect both over-scale and under-scale currents.

Table 1: Failure rates according to IEC 61508

Failure Categories	I_{sd}	I_{su}^*	I_{dd}	I_{du}	SFF
Low trip	352 FIT	344 FIT	75 FIT	296 FIT	72.3%
High trip	75 FIT	344 FIT	352 FIT	296 FIT	72.3%

(*Note that the SU category includes failures that do not cause a spurious trip)

A user of the 8800C Vortex Flowmeter can utilize these failure rates in a probabilistic model of a safety instrumented function (SIF) to determine suitability in part for safety instrumented system (SIS) usage in a particular safety integrity level (SIL). A full table of failure rates for different operating conditions is presented in section 4.5 along with all assumptions.

Type B component: "Complex" component (using micro controllers or programmable logic); for details see 7.4.3.1.3 of IEC 61508-2.

Table of Contents

Management summary.....	2
1 Purpose and Scope.....	4
2 Project management	5
2.1 <i>exida.com</i>	5
2.2 Roles of the parties involved.....	5
2.3 Standards / Literature used	5
2.4 Reference documents.....	6
2.4.1 Documentation provided by the customer.....	6
2.4.2 Documentation generated by <i>exida.com</i>	6
3 Product Description.....	7
4 Failure Modes, Effects, and Diagnostics Analysis	8
4.1 Description of the failure categories	8
4.2 Methodology – FMEDA, Failure rates	9
4.2.1 FMEDA.....	9
4.2.2 Failure rates	9
4.3 Assumptions	9
4.4 Behavior of the safety logic solver	10
4.5 Results.....	11
5 Using the FMEDA results.....	12
5.1 Converting failure rates to IEC 61508 format.....	12
5.2 PFD _{AVG} calculation 8800C Vortex Flowmeter.....	13
6 Terms and Definitions	14
7 Status of the document	15
7.1 Liability.....	15
7.2 Releases.....	15
7.3 Future Enhancements	15
7.4 Release Signatures	15

1 Purpose and Scope

Generally three options exist when doing an assessment of sensors, interfaces and/or final elements.

Option 1: Hardware assessment according to IEC 61508

Option 1 is a hardware assessment by exida.com according to the relevant functional safety standard(s) like DIN V VDE 0801, IEC 61508 or EN 954-1. The hardware assessment contains a FMEDA to determine the fault behavior and the different failure rates resulting in the Safe Failure Fraction (SFF) and the average Probability of Failure on Demand (PFD_{AVG}).

This option for pre-existing hardware devices shall provide the safety instrumentation engineer with the required failure data as per IEC 61508 / IEC 61511 and does not contain any software assessment.

Option 2: Hardware assessment with proven-in-use consideration according to IEC 61508 / IEC 61511

Option 2 is an assessment by exida.com according to the relevant functional safety standard(s) like DIN V VDE 0801, IEC 61508 or EN 954-1. The hardware assessment contains a FMEDA to determine the fault behavior and the different failure rates resulting in the Safe Failure Fraction (SFF) and the average Probability of Failure on Demand (PFD_{AVG}). The option contains in addition an assessment of the proven-in-use demonstration of the device and its software including the modification process.

This option for pre-existing programmable electronic devices shall provide the safety instrumentation engineer with the required failure data as per IEC 61508 / IEC 61511 and justify the reduced fault tolerance requirements of IEC 61511 for sensors, final elements and other PE field devices.

Option 3: Full assessment according to IEC 61508

Option 3 is a full assessment by exida.com according to the relevant application standard(s) like IEC 61511 or EN 298 and the necessary functional safety standard(s) like DIN V VDE 0801, IEC 61508 or EN 954-1. The full assessment extends option 1 by an assessment of all fault avoidance and fault control measures during hardware and software development.

This option is most suitable for newly developed software based field devices and programmable controllers to demonstrate full compliance with IEC 61508 to the end-user.

This assessment shall be done according to option 1.

This document shall describe the results of the Failure Modes, Effects, and Diagnostic Analysis (FMEDA) of the 8800C Vortex Flowmeter. From these failure rates, the safe failure fraction (SFF) and example PFD_{AVG} values are calculated.

2 Project management

2.1 *exida.com*

exida.com is one of the world's leading knowledge companies specializing in automation system safety and availability with over 100 years of cumulative experience in functional safety. Founded by several of the world's top reliability and safety experts from assessment organizations like TUV and manufacturers, *exida.com* is a partnership with offices around the world. *exida.com* offers training, coaching, project oriented consulting services, internet based safety engineering tools, detail product assurance and certification analysis and a collection of on-line safety and reliability resources. *exida.com* maintains a comprehensive failure rate and failure mode database on process equipment.

2.2 Roles of the parties involved

Rosemount Inc. Manufacturer of the 8800C Vortex Flowmeter
exida.com Project leader of the FMEDA

2.3 Standards / Literature used

The services delivered by *exida.com* were performed based on the following standards / literature.

[N1]	IEC 61508-2: 1999	Functional Safety of Electrical/Electronic/Programmable Electronic Safety-Related Systems
[N2]	FMD-91 & FMD-97, RAC 1991, 1997	Failure Mode / Mechanism Distributions, Reliability Analysis Center. Statistical compilation of failure mode distributions for a wide range of components
[N3]	NPRD-95, RAC 1995	Nonelectronic Parts Reliability Data, Reliability Analysis Center. Statistical compilation of failure rate data, incl. mechanical and electrical sensors
[N4]	SN 29500	Failure rates of components
[N5]	US MIL-STD-1629	Failure Mode and Effects Analysis, National Technical Information Service, Springfield, VA. MIL 1629.
[N6]	Telcordia (Bellcore) Failure rate database and models	Statistical compilation of failure rate data over a wide range of applications along with models for estimating failure rates as a function of the application.
[N7]	Safety Equipment Reliability Handbook, 2003	<i>exida.com</i> L.L.C, Safety Equipment Reliability Handbook, 2003, ISBN 0-9727234-0-4
[N8]	Goble, W.M. 1998	Control Systems Safety Evaluation and Reliability, ISA, ISBN #1-55617-636-8. Reference on FMEDA methods

2.4 Reference documents

2.4.1 Documentation provided by the customer

[D1]	0880-7600, AG, July 21, 1999	Schematic Diagram, Vortex Sensor Board
[D2]	0880-7603, AC, May 6, 1999	Schematic Diagram, Vortex Output Board
[D3]	0880-7606, A, March 28, 1996	Schematic Diagram, Vortex Terminal Board
[D4]	0880-7609, A, June 26, 1996	Schematic Diagram Vortex LCD Board
[D5]	ASIC-****, 0.3, March 23, 2001	Modac-3 Product Definition
[D6]	ASIC-2069, 1.1, March 9, 2001	Edinburgh Vortex Sigma-Delta III ASIC SSD
[D7]	ASIC-2067, 2.4, July 11, 2001	Vortex Digital Signal Processing with Embedded Coprocessor

2.4.2 Documentation generated by *exida.com*

[R1]	Vortex.xls, September 17, 2002	System FMEDA, 8800C Vortex flowmeter
[R2]	FMEDA 8800C _v1.doc, final, September 17, 2002	FMEDA report, 8800C Vortex flowmeter

3 Product Description

The 8800C Vortex Flowmeter is a 4 – 20 mA smart device. The 8800C is most commonly used for gases, liquids and steam. The model includes a non-clogging sensor and an all-welded meter body that requires no process seals and purges fugitive emissions. The different devices can be equipped with or without display.

The 8800C Vortex Flowmeter is classified as a Type B² device according to IEC61508, having a hardware fault tolerance of 0. It contains self-diagnostics and is programmed to send it's output to a specified failure state, either high or low upon internal detection of a failure.

This flow meter features HART communication. The pulse output option is not recommended for safety applications. For safety instrumented systems usage it is assumed that the 4 – 20 mA output is used as the primary safety variable. All other possible output variants are not covered by this report.

Type B component: “Complex” component (using micro controllers or programmable logic); for details see 7.4.3.1.3 of IEC 61508-2.

4 Failure Modes, Effects, and Diagnostics Analysis

The Failure Modes, Effects, and Diagnostic Analysis was done based on the documentation provided by Rosemount Inc. and is documented in [R1] and [R2]. When the effect of a certain failure mode could not be analyzed theoretically, the failure modes were introduced on component level and the effects of these failure modes were examined on system level.

4.1 Description of the failure categories

In order to judge the failure behavior of the 8800C Vortex Flowmeter, the following definitions for the failure of the product were considered.

Fail-Safe State	State where output exceeds the user defined threshold.
Fail Safe	Failure that causes the module / (sub)system to go to the defined fail-safe state without a demand from the process. Safe failures are divided into safe detected (SD) and safe undetected (SU) failures.
Fail Dangerous	Failure that deviates the measured input state or the actual output by more than 2% of span and that leaves the output within active scale.
Fail Dangerous Undetected	Failure that is dangerous and that is not being diagnosed by internal diagnostics.
Fail Dangerous Detected	Failure that is dangerous but is detected by internal diagnostics (These failures may be converted to the selected fail-safe state).
Fail High	Failure that causes the output signal to go to the maximum output current (> 21,5 mA, output saturate high)
Fail Low	Failure that causes the output signal to go to the minimum output current (< 3,6 mA, output saturate low)
Fail No Effect	Failure of a component that is part of the safety function but that has no effect on the safety function.
Annunciation Undetected	Failure that does not directly impact safety but does impact the ability to detect a future fault (such as a fault in a diagnostic circuit) and that is not detected by internal diagnostics.

The failure categories listed above expand on the categories listed in [N1] which are only safe and dangerous, both detected and undetected. The reason for this is that, depending on the application, a Fail High or a Fail Low can either be safe or dangerous and may be detected or undetected depending on the programming of the logic solver. Consequently, during a Safety Integrity Level (SIL) verification assessment the Fail High and Fail Low failure categories need to be classified as either safe or dangerous.

The Annunciation Undetected failures are provided for those who wish to do reliability modeling more detailed than required by IEC61508. In IEC 61508 [N1] the No Effect and Annunciation Undetected failures are defined as safe undetected failures even though they will not cause the safety function to go to a safe state. Therefore they need to be considered in the Safe Failure Fraction calculation.

4.2 Methodology – FMEDA, Failure rates

4.2.1 FMEDA

A Failure Modes and Effects Analysis (FMEA) is a systematic way to identify and evaluate the effects of different component failure modes, to determine what could eliminate or reduce the chance of failure, and to document the system in consideration.

An FMEDA (Failure Mode Effect and Diagnostic Analysis) is an FMEA extension. It combines standard FMEA techniques with extension to identify online diagnostics techniques and the failure modes relevant to safety instrumented system design. It is a technique recommended to generate failure rates for each important category (safe detected, safe undetected, dangerous detected, dangerous undetected, fail high, fail low) in the safety models. The format for the FMEDA is an extension of the standard FMEA format from MIL STD 1629A, Failure Modes and Effects Analysis.

4.2.2 Failure rates

The failure rate data used by *exida.com* in this FMEDA is from a proprietary component failure rate database derived using the Telcordia (N6) failure rate database/models, the SN29500 (N4) failure rate database and other sources. The rates were chosen in a way that is appropriate for safety integrity level verification calculations. The rates were chosen to match operating stress conditions typical of an industrial field environment similar to IEC 645-1, Class C. It is expected that the actual number of field failures will be less than the number predicted by these failure rates.

The user of these numbers is responsible for determining their applicability to any particular environment. Accurate plant specific data may be used for this purpose. If a user has data collected from a good proof test reporting system that indicates higher failure rates, the higher numbers shall be used. Some industrial plant sites have high levels of stress. Under those conditions the failure rate data is adjusted to a higher value to account for the specific conditions of the plant.

4.3 Assumptions

The following assumptions have been made during the Failure Modes, Effects, and Diagnostic Analysis of the 8800C Vortex Flowmeter.

- Only a single component failure will fail the entire product
- Failure rates are constant, wear out mechanisms are not included.
- Propagation of failures is not relevant.
- All components that are not part of the safety function and cannot influence the safety function (feedback immune) are excluded.
- The HART protocol is only used for setup, calibration, and diagnostics purposes, not for safety critical operation.
- The application program in the logic solver is constructed in such a way that Fail High and Fail Low failures are detected regardless of the effect, safe or dangerous, on the safety function.

- The stress levels are average for an industrial environment and can be compared to the Ground Fixed classification of MIL-HNBK-217F. Alternatively, the assumed environment is similar to:
 - IEC 645-1, Class C (sheltered location) with temperature limits within the manufacturer's rating and an average temperature over a long period of time of 40°C. Humidity levels are assumed within manufacturer's rating.
- External power supply failure rates are not included.

4.4 Behavior of the safety logic solver

Depending on the application, the following scenarios are possible:

- Low Trip: the safety function will go to the predefined fail-safe state when the process value below a predefined low set value. A current < 3.6mA (Fail Low) is below the specified trip-point.
- High Trip: the safety function will go to the predefined fail-safe state when the process value exceeds a predefined high set value. A current > 21.5mA (Fail High) is above the specified trip-point.

The Fail Low and Fail High failures can either be detected or undetected by a connected logic solver. The PLC Detection Behavior in Table 2 represents the under-range and over-range detection capability of the connected logic solver.

Table 2 Application example

Application	PLC Detection Behavior	I_{low}	I_{high}
Low trip	< 4mA	= λ_{sd}	= λ_{du}
Low trip	> 20mA	= λ_{su}	= λ_{dd}
Low trip	< 4mA and > 20mA	= λ_{sd}	= λ_{dd}
Low trip	-	= λ_{su}	= λ_{du}
High trip	< 4mA	= λ_{dd}	= λ_{su}
High trip	> 20mA	= λ_{du}	= λ_{sd}
High trip	< 4mA and > 20mA	= λ_{dd}	= λ_{sd}
High trip	-	= λ_{du}	= λ_{su}

In this analysis it is assumed that the logic solver is able to detect under-range and over-range currents, therefore the yellow highlighted behavior is assumed.

4.5 Results

Using reliability data extracted from the exida.com component reliability database the following failure rates resulted from the 8800C Vortex Flowmeter FMEDA.

Table 3 Failure rates 8800C Vortex Flowmeter

Failure category			Failure rate (in FITs)
Fail High (detected by the logic solver)			75
Fail Low (detected by the logic solver)			352
	Fail detected (int. diag.)	310	
	Fail low (inherently)	42	
Fail Dangerous Undetected			296
No Effect			344
Annunciation Undetected			0

It is assumed that upon the detection of a failure the output will be sent downscale, all detected failure categories are sub-categories of the fail low failure category.

According to IEC 61508 [N1], the Safe Failure Fraction (SFF) of the 8800C Vortex Flowmeter should be calculated. The SFF is the fraction of the overall failure rate of a device that results in either a safe fault or a diagnosed unsafe fault. As both the Fail High and Fail Low failure categories are assumed to be detected by the logic solver (regardless of the fact if their effect is safe or dangerous), the Safe Failure Fraction can be calculated independently of the 8800C Vortex Flowmeter application.

This is reflected in the following formulas for SFF:

$$SFF = 1 - \lambda_{du} / \lambda_{total}$$

Note that according to IEC61508 definition the No Effect and Annunciation Undetected failures are classified as safe and therefore need to be considered in the Safe Failure Fraction calculation and are included in the total failure rate.

Table 4 Safe Failure Fraction of 8800C Vortex Flowmeter

8800C Vortex Flowmeter	SFF
8800C Vortex Flowmeter	72.3%

The architectural constraint type for 8800C Vortex Flowmeter is B. The SFF and required SIL determine the level of hardware fault tolerance that is required per requirements of IEC 61508 [N1] or IEC 61511. The SIS designer is responsible for meeting other requirements of applicable standards for any given SIL as well.

5 Using the FMEDA results

5.1 Converting failure rates to IEC 61508 format

The failure rates that are derived from the FMEDA for the 8800C Vortex Flowmeter are in a format different from the IEC 61508 format. This section will explain how the failure rates can be converted into the IEC 61508 format.

First of all, depending on the application, the high and low failure rates of the 8800C Vortex Flowmeter must be classified as either safe or dangerous. Assume an application where a safety action needs to be performed if the flow in a pipe drops below a certain level. The 8800C Vortex Flowmeter will therefore be configured with a low trip level. A low failure of the transmitter will cause the transmitter output to go through the low trip level. Consequently the transmitter will indicate that the safety action needs to be performed. Therefore a low failure can be classified as a safe failure for this application. A high failure on the other hand will cause the transmitter output to move away from the trip level and therefore not cause a trip. The failure will prevent the transmitter from indicating that the safety action needs to be performed and is therefore classified as a dangerous failure for this application.

Assuming that the logic solver can detect both over-range and under-range, a low failure can be classified as a safe detected failure and a high failure can be classified as a dangerous detected failure. For this application the following would then be the case:

$$\lambda^H = \lambda^{DD} = 75 * 10^{-9} \text{ failures per hour}$$

$$\lambda^L = \lambda^{SD} = 352 * 10^{-9} \text{ failures per hour}$$

$$\lambda^{DU} = 296 * 10^{-9} \text{ failures per hour}$$

In a similar way the high and low failure rates can be classified as respectively safe detected and dangerous detected in case the application has a high trip level. The failure rates as displayed above are the same failure rates as stored in the exida.com equipment database that is part of the online SIL verification tool, SILver.

Furthermore the No Effect failures and Annunciation Undetected failure are classified as Safe Undetected failures according to IEC 61508. Note that these failures will not affect system reliability or safety, and should not be included in spurious trip calculations.

Note that the dangerous undetected failures will of course remain dangerous undetected.

5.2 PFD_{AVG} calculation 8800C Vortex Flowmeter

An average Probability of Failure on Demand (PFD_{AVG}) calculation is performed for a single (1oo1) 8800C Vortex Flowmeter. The failure rate data used in this calculation is displayed in section 4.5.

The resulting PFD_{AVG} values for a variety of proof test intervals are displayed in Figure 1. As shown in the figure the PFD_{AVG} value for a single 8800C Vortex Flowmeter with a proof test interval of 1 year equals 1.30E-03.

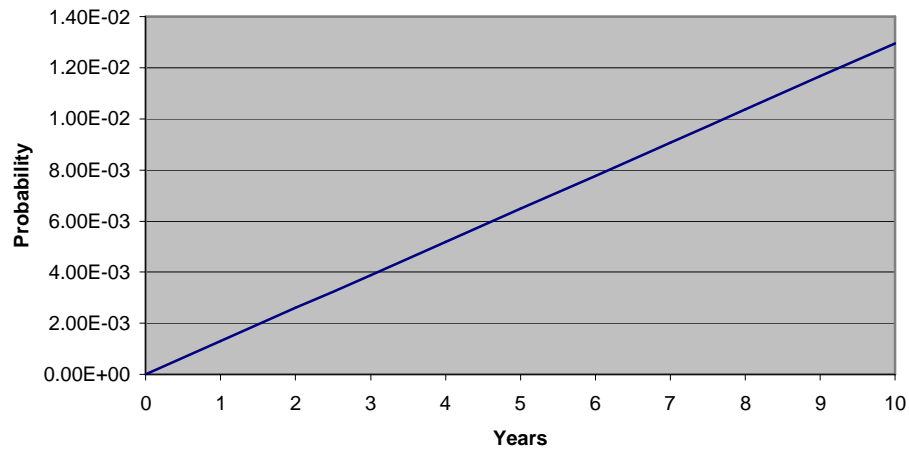


Figure 1: PFD_{AVG}(t) 8800C Vortex Flowmeter

For SIL 1 applications, the PFD_{AVG} value needs to be = 10^{-2} and $< 10^{-1}$. This means that for a SIL 1 application, the PFD_{AVG} for a 1-year Proof Test Interval of the 8800C Vortex Flowmeter is equal to 1.3% of the range. These results must be considered in combination with PFD_{AVG} values of other devices of a Safety Instrumented Function (SIF) in order to determine suitability for a specific Safety Integrity Level (SIL).

6 Terms and Definitions

FIT	Failure In Time (1×10^{-9} failures per hour)
FMEDA	Failure Mode Effect and Diagnostic Analysis
HART	Highway Addressable Remote Transducer
HFT	Hardware Fault Tolerance
Low demand mode	Mode, where the frequency of demands for operation made on a safety-related system is no greater than one per year and no greater than twice the proof test frequency.
PFD_{AVG}	Average Probability of Failure on Demand
SFF	Safe Failure Fraction summarizes the fraction of failures, which lead to a safe state and the fraction of failures which will be detected by diagnostic measures and lead to a defined safety action.
SIF	Safety Instrumented Function
SIL	Safety Integrity Level
SIS	Safety Instrumented System – Implementation of one or more Safety Instrumented Functions. A SIS is composed of any combination of sensor(s), logic solver(s), and final element(s).
Type A component	“Non-Complex” component (using discrete elements); for details see 7.4.3.1.3 of IEC 61508-2
Type B component	“Complex” component (using micro controllers or programmable logic); for details see 7.4.3.1.3 of IEC 61508-2

7 Status of the document

7.1 Liability

exida.com prepares FMEDA reports based on methods advocated in International standards. Failure rates are obtained from a collection of industrial databases. *exida.com* accepts no liability whatsoever for the use of these numbers or for the correctness of the standards on which the general calculation methods are based.

7.2 Releases

Version: V0
Revision: R1.0
Version History: V0, R1.0: Draft report September 17, 2002
V1, R1.0 Initial release September 17, 2002
V2, R1.0 Updated format, September 08, 2003
Authors: William M. Goble – John C. Grebe
Review: V0, R1.0 William M. Goble
V2, R1.0 Rachel Amkreutz September 05, 2003
Release status: Released to client

7.3 Future Enhancements

At request of client.

7.4 Release Signatures



John Grebe, Principal Engineer



Dr. William M. Goble, P.E., CFSE, Principal Partner