

GUARD-IT®

SINCE 1948
RACO
REMOTE ALARMS AND CONTROLS


...a new
**low-cost autodialer
with flexible features
for dependable
Alarm Autodialing
and Remote
Monitoring.**



GUARD-IT® delivers the functionality you need, and it's backed by RACO's reputation for dependability, quality, service, and factory support.

Analog or Digital Inputs

GUARD-IT monitors 4 input channels. Each channel can be configured for an analog or digital signal input. The system utilizes the public telephone network as a basic medium for transmission of alarm messages and status calls. It is field programmable by the user at the system's control panel via a standard touch tone phone handset.

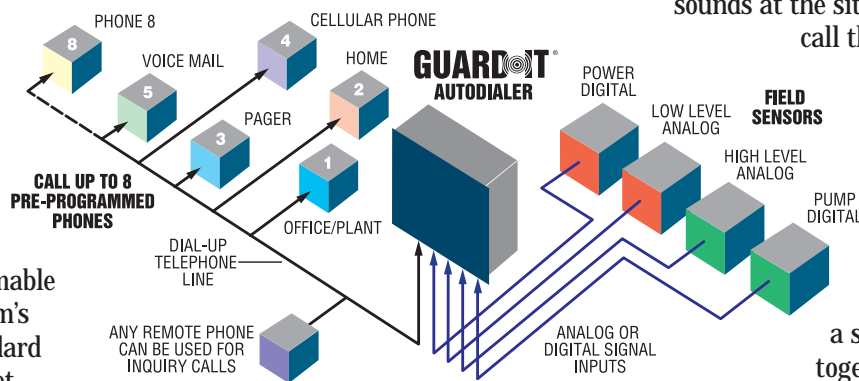

and the specific alarm condition in the form of a digitally pre-recorded voice message. In addition to stan-

phone. When acknowledging an alarm, a built-in microphone permits the caller to listen for background sounds at the site. The user can also call the system from any

remote phone for a status report of all points being monitored.

Voice Messaging

The voice transmission consists of a station identification together with an alarm message giving details on the fault. The station identification and alarm messages are digitally recorded by the user. RACO pioneered the concept of using digitally-recorded and synthesized voice messages in auto-

dialers. By using electronic voice reporting technology, GUARD-IT eliminates the need for often-unreliable audio tape autodialers.

Automatic Alarm Reporting

Upon detection of an alarm condition, GUARD-IT automatically calls a list of up to 8 pre-programmed phone numbers over the standard dial-up telephone network, calling until it gets an acknowledgement. When a connection is made, the system reports the station identity

and the specific alarm condition in the form of a digitally pre-recorded voice message. In addition to standard phones in office, plant, or home, the alarm calling sequence can also include calls to pagers, cellular phones, and voice mail.

Alarm Acknowledgment

An alarm is acknowledged simply by pressing a button on the called

GUARD-IT®



Set-up and Programming

System set-up, voice recording, and programming is accomplished via an external touch tone phone which plugs into a standard phone jack on the system's front panel. The user simply follows voice instructions given over the phone.

System Controls

System operating status is provided by front panel LED indicators. System off/disarm ready controls are provided on front panel. Surge protection and noise suppression are standard.

A Truly Modern Autodialer

GUARD-IT fills the requirement of a modern autodialer—it should be extremely reliable and be able to tell the called party as much information about the nature of an alarm as possible so that the right personnel can respond quickly and appropriately. Many other autodialers don't meet these requirements.

Compare GUARD-IT with all the others and you will see that this multi-featured system offers a way to get RACO flexibility, quality, and dependability at a price you'd expect to pay for one of the budget models.

Specifications

ELECTRICAL

Power Requirements: User supplied 10-14 VDC, 500 mA max.

Power consumption:
200 mA minimum standby
500 mA maximum active

Power failure: Automatic alarm for external power failure.

Battery Charging: Precision voltage controlled, automatic rapid recharge after drain.

Universal Signal Inputs:
Digital Inputs; open contacts see 5VDC, closed contacts see 5 mA DC

Analog Inputs; 4-20 mA, single ended.
Maximum voltage drop VDC.
Resolution 0.2%; absolute accuracy 0.5%

Local Alarm Relay: Transistor output for TTL or relay drive (500 mA 24 VDC max) activated during unacknowledged alarm.

RJ11 Telephone line jack for connection to public telephone network.

PHYSICAL

Surge protection: Solid state protectors on phone, power, and signal lines.

Enclosure: Single circuit card in durable steel cabinet designed for mounting on control panel wall or flush mounted inside a larger control panel with faceplate visible.

Weight: 4 pounds, 6 pounds with battery

Dimensions: 6.85"H x 8.85"W x 2.85"D

Mounting Centers: 3.6"H x 9"W

ENVIRONMENTAL

Temperature range: 20° to 130°F.

Humidity: 0 to 95%, noncondensing.

TELEPHONE

Rotary pulse or tone dialing.

Dials up to 8 different numbers, each up to 60 digits long.

Time between alarm phone calls programmable 0.1 to 99.9 minutes.

Smart calling call progress monitoring detects dial tone, basic ringback and busy signal.

Alarm acknowledgement by touch tone key or callback.

Compatible with most pager, cellular, and voicemail systems.

User-furnished standard touch tone handset required for programming. FCC Registered.

PROGRAMMING

Standard phone jack on front panel for programming phone. Voice menu instructions guide programming.



SPEECH MESSAGES

User digitally records five messages, Station ID and four channel alarm messages. High definition digital recordings up to 12 seconds per message. Resident synthesized voice vocabulary for programming guidance.

FACTORY OPTIONS

Power Supply, UL Class 2 120 VAC 50/60 Hz adaptor.

Battery backup, internal 6 volt; 4 AH gel cell provides 20 hours operation during power failure.

NEMA 4X enclosure.

Cellular communication system.

WARRANTY

Two year parts and labor warranty. See separate warranty card for details.

For ordering information, call toll free at... 800-722-6999

SINCE 1948
RACO®
REMOTE ALARMS AND CONTROLS

RACO MANUFACTURING AND ENGINEERING, CO.

1400 62nd Street, Emeryville, CA 94608

Phone: (510) 658-6713

1-800-722-6999

Fax: (510) 658-3153

E-mail: sales@racoman.com

Web: www.racoman.com