



RECOMMENDED  $D > 150$  [6].  
 MIN.  $D = 50$  [2] REQUIRES  
 SPECIAL CONFG. SETTINGS.  
 MAX REC.  $H < (D + 100)$  [D+4].

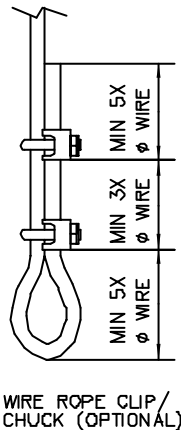

DEPENDING ON  
 TURBULENCE IN  
 TANK AND MOUNTING  
 ANGLE THE PROBE  
 MAY NEED TO BE  
 ANCHORED OR  
 SUPPORTED.

- ② GUIDELINES AND TANK CONNECTIONS VALID FOR BOTH Ø4 AND Ø6 WIRE.
- ① P/T-RATING FOR FLANGE; SEE REF. MANUAL.

FOR MORE INFO. SEE  
 REFERENCE MANUAL

04	GASKET	1	ACC. TO BSP-G THREAD STD.	CUSTOMER
03	GASKET	1	SOFT GASKET T=MIN 1,6 (ANSI B16.5/1A, EN1514-1/IBC) SEE NOTE 1	CUSTOMER
02	SCREW/NUT/WASHER	-	ACC. TO FLANGE STD. SEE NOTE 1.	CUSTOMER
01	FLANGE	1	DIM. ACC. TO ANSI B 16.5/ EN 1092-1. OTHER ON REQUEST. P/T-RATING SEE NOTE 1.	RMT
POS	ITEM DESCRIPTION	QTY	REMARK	SUPPLIER

ISSUED BY	WEEK	PRODUCT CODE	FILE	INSTALLATION DRAWING TITLE		
GU-TK-RS	0311	3300	IDEAS	MECHANICAL INSTALLATION DWG		
APPROVED BY	WEEK	ORIGINAL DWG NO.	SCALE	FLEXIBLE SINGLE LEAD, SERIES 3300		
GU-HF	0319	9150077-974	1:4			
SAAB ROSEMOUNT		1 ST ANGLE	DWG TYPE	DWG NO.	ISSUE	SHEET
			2	9150077-974	1	01/01

THE COPYRIGHT/OWNERSHIP OF THIS DOCUMENT IS AND WILL REMAIN OURS. THE DOCUMENT MUST NOT BE USED WITHOUT OUR AUTHORIZATION OR BRUGHT TO THE KNOWLEDGE OF A THIRD PARTY. CONTRAVENTION WILL BE PROSECUTED. SAAB MARINE ELECTRONICS AB.