

FLOW RATE MONITOR / TOTALIZER

WITH HIGH / LOW ALARM, ANALOG AND PULSE SIGNAL OUTPUTS



Features

- Displays instantaneous flow rate, total and accumulated total.
- Four alarm values can be entered: low-low, low, high and high-high flow rate alarm.
- Large 17mm (0.67") digit selection for flow rate or total.
- Selectable on-screen engineering units; volumetric or mass.
- Auto backup of settings and running totals.
- Operational temperature -30°C up to +80°C (-22°F up to 178°F).
- Very compact design for panel mount, wall mount or field mount applications.
- Rugged aluminum field mount enclosure IP67/NEMA4X.
- Intrinsically Safe
 - Ex II 1 GD EEx ia IIB/IIC T4 T100°C.
- Explosion/flame proof Ex II 2 GD EEx d IIB T5.
- Alarm, analog and pulse signal outputs.
- Full Modbus communication RS232/485/TTL.
- Loop or battery powered, 8 - 24V AC/DC or 115 - 230V AC power supply.
- Sensor supply 3.2 / 8.2 / 12 / 24V DC.

Signal output

- Up to four free configurable alarm outputs.
- (0)4 - 20mA / 0 - 10V DC according to flow rate.
- Up to four scaled pulse outputs according to accumulated total.

Signal input

Flow

- Reed-switch.
- NAMUR.
- NPN/PNP pulse.
- Sine wave (coil).
- Active pulse signals.
- (0)4 - 20mA.
- 0 - 10V DC.

Applications

- Liquid flow measurement where continuous flow rate monitoring is important. Also re-transmission of the flow rate and/or totalizer functions or serial communication is required. Alternative basic model: F013 or more advanced F118.

General information

Introduction

The F113 is a versatile flow rate indicator and totalizer with continuous flow rate monitoring feature. It offers the facility to set two low flow rate and two high flow rate alarm values. If desired, a delay function can be set up to allow for an incorrect flow rate for a certain period of time. Up to four outputs are available to transmit the alarm condition and/or the accumulated total. A wide selection of options further enhance this model's capabilities, including Intrinsic Safety and full Modbus communication.

Display

The display has large 17mm (0.67") and 8mm (0.31") digits which can be set to show flow rate, totals and alarm values. The alarm values can be pass-code protected. On-screen engineering units are easily configured from a comprehensive selection. The accumulated total can register up to 11 digits and is backed-up in EEPROM memory every minute.

Configuration

All configuration settings are accessed via a simple operator menu which can be pass-code protected. Each setting is clearly indicated with an alphanumeric description, therefore avoiding confusing abbreviations and baffling codes. Once familiar with one F-series product, you will be able to program all models in the series without a manual. All settings are safely stored in EEPROM memory in the event of sudden power failure.

Analog output signal

The flow rate is re-transmitted with the (0)4 - 20mA or 0 - 10V DC output signal. The output signal is updated ten times per second with a filter function being available to smoothen out the signal if desired. The output value is user defined in relation to the flow rate, e.g. 4mA equals to 15L/Hr and 20mA equals to 2000L/Hr. The output signal can be passive, active or isolated where the passive output type will loop power the F113 as well.

Pulse output

The scaleable pulse output, reflects the count on the accumulated display. The pulse length is

user defined and the maximum output frequency is 64Hz.

Signal input

The F113 will accept most pulse and analog input signals for flow or mass flow measurement. The input signal type can be selected by the user in the configuration menu without having to adjust any sensitive mechanical dip-switches or jumpers. The analog input versions are even available as 4-20mA input loop powered displays.

Communication

All process data and settings can be read and modified manually or through the Modbus communication link (RS232 / RS485). Full Modbus functionality remains available for the Intrinsically Safe version (TTL).


Hazardous areas

For hazardous area applications, this model has been ATEX certified Intrinsically Safe $\text{Ex II 1 GD EEx ia IIB / IIC T4 T100}^\circ\text{C}$ with an allowed operational temperature of -30°C to $+70^\circ\text{C}$ (-22°F to $+158^\circ\text{F}$). A flame proof enclosure is also available with the rating $\text{Ex II 2 GD EEx d IIB T5}$.

Enclosures


Various types of enclosures can be selected, all ATEX approved. As standard the F113 is supplied in an GRP panel mount enclosure, which can be converted to an IP67 / NEMA 4X GRP field mount enclosure by the addition of a back case. Most popular is our rugged aluminum field mount enclosure with IP67 / NEMA 4X rating. Both European or U.S. cable gland entry threads are available.

Overview application F113

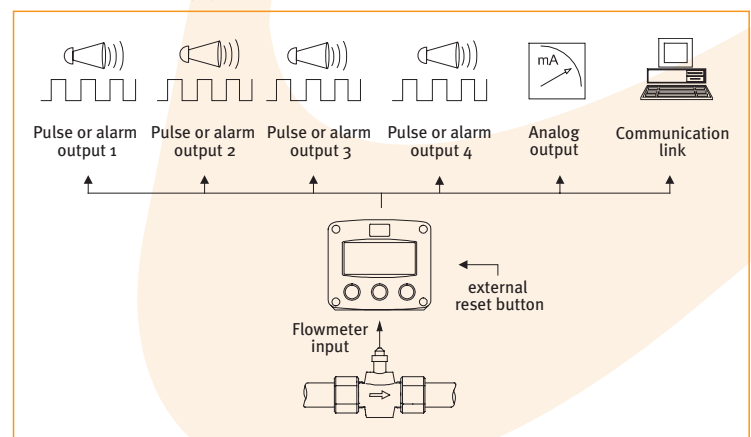


Dimensions enclosures


Aluminum & GRP panel mount enclosure

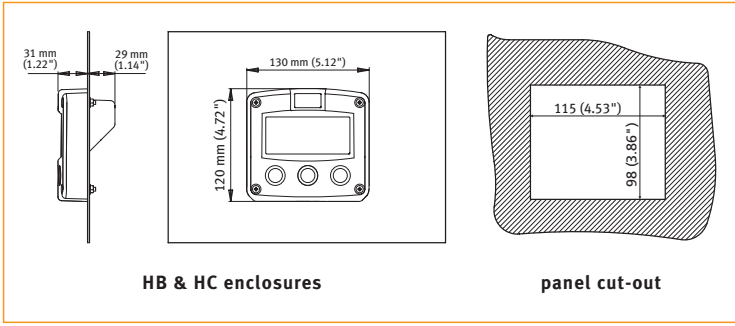


Aluminum & GRP field / wall mount enclosures

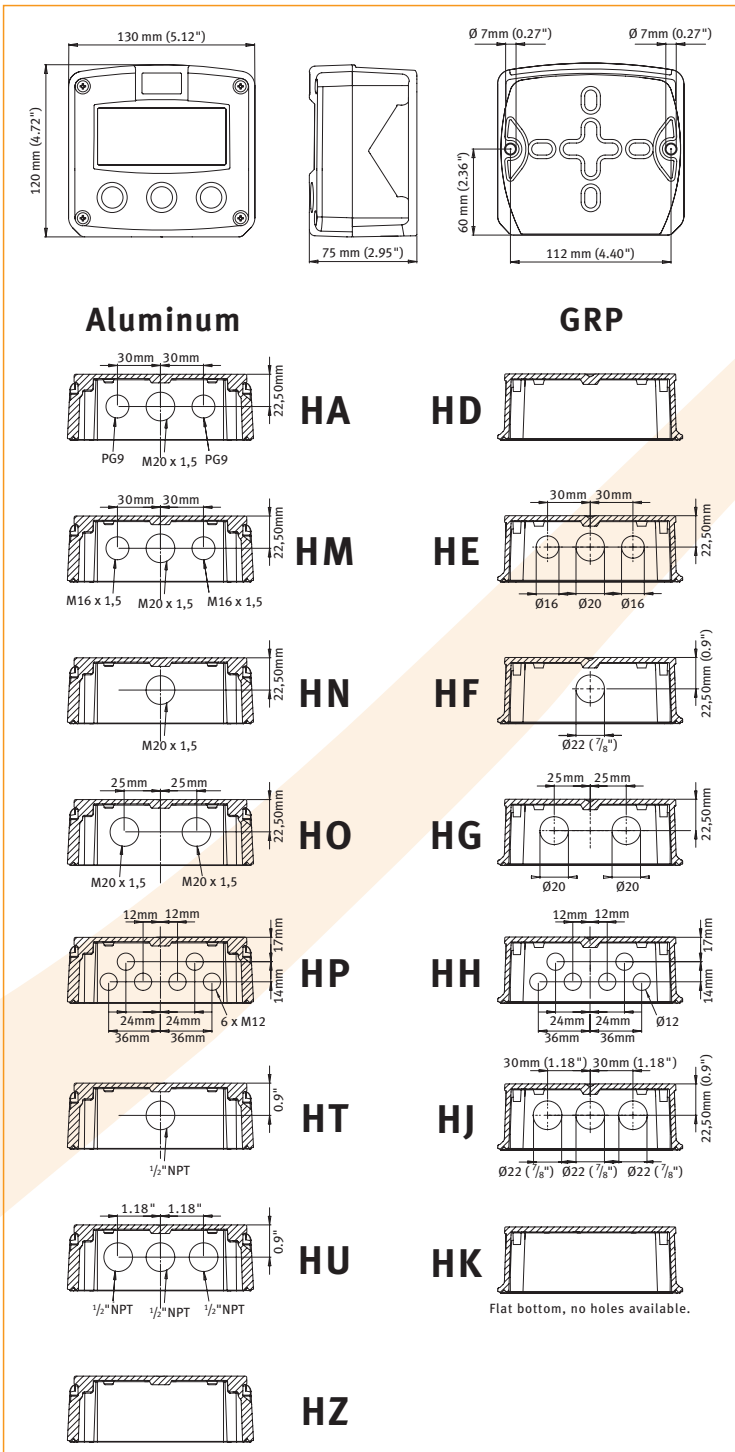


Terminal connections

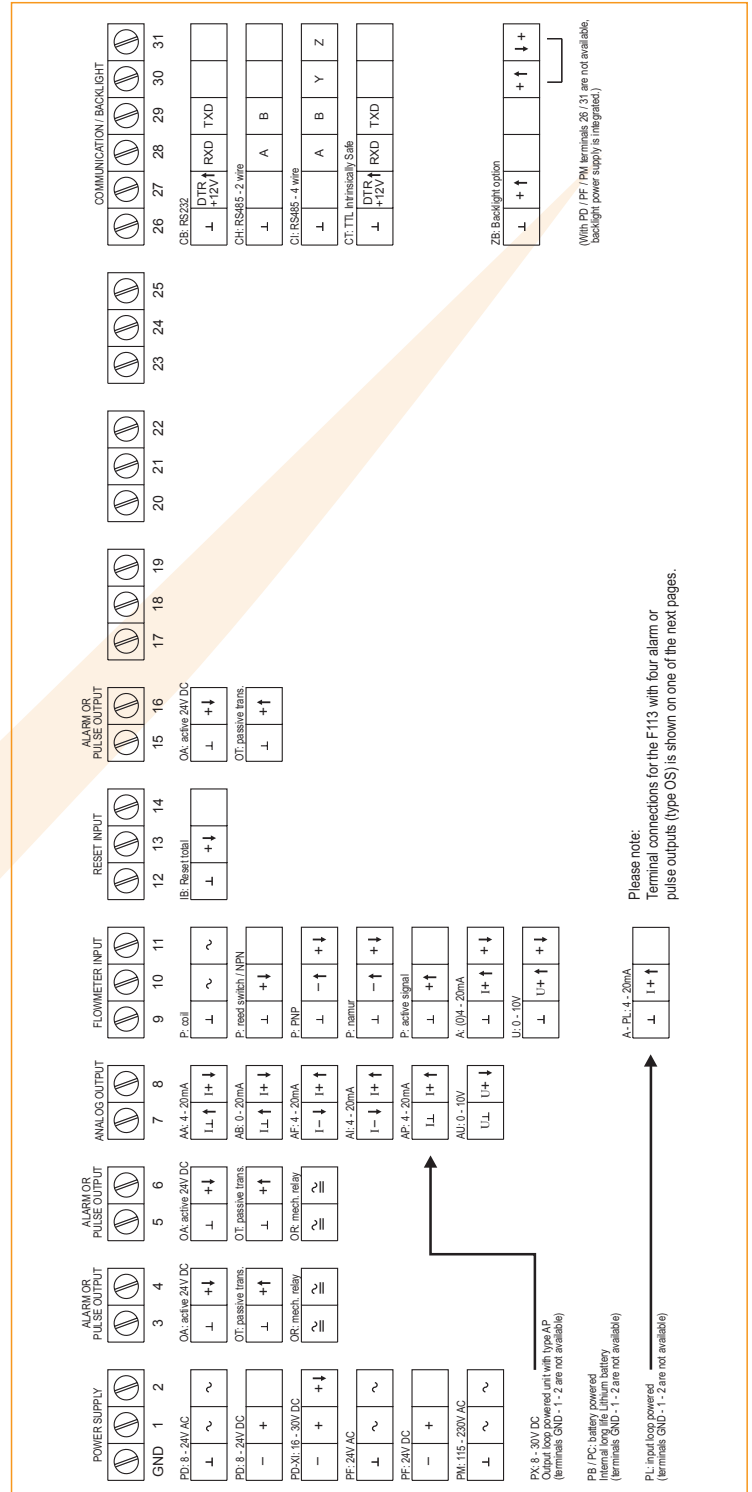

Display example - 90 x 40mm (3.5" x 1.6")

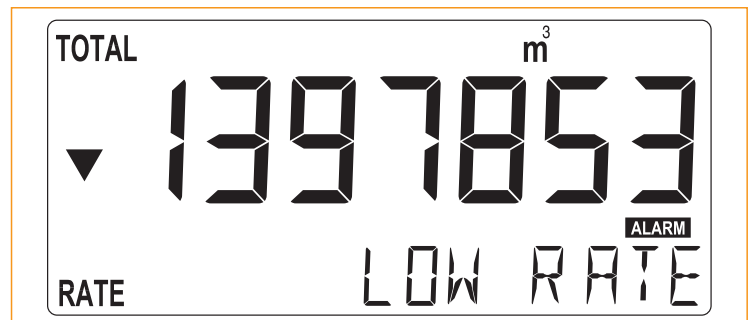


Typical wiring diagram F113-P-AP-CH-IB-OT-PX

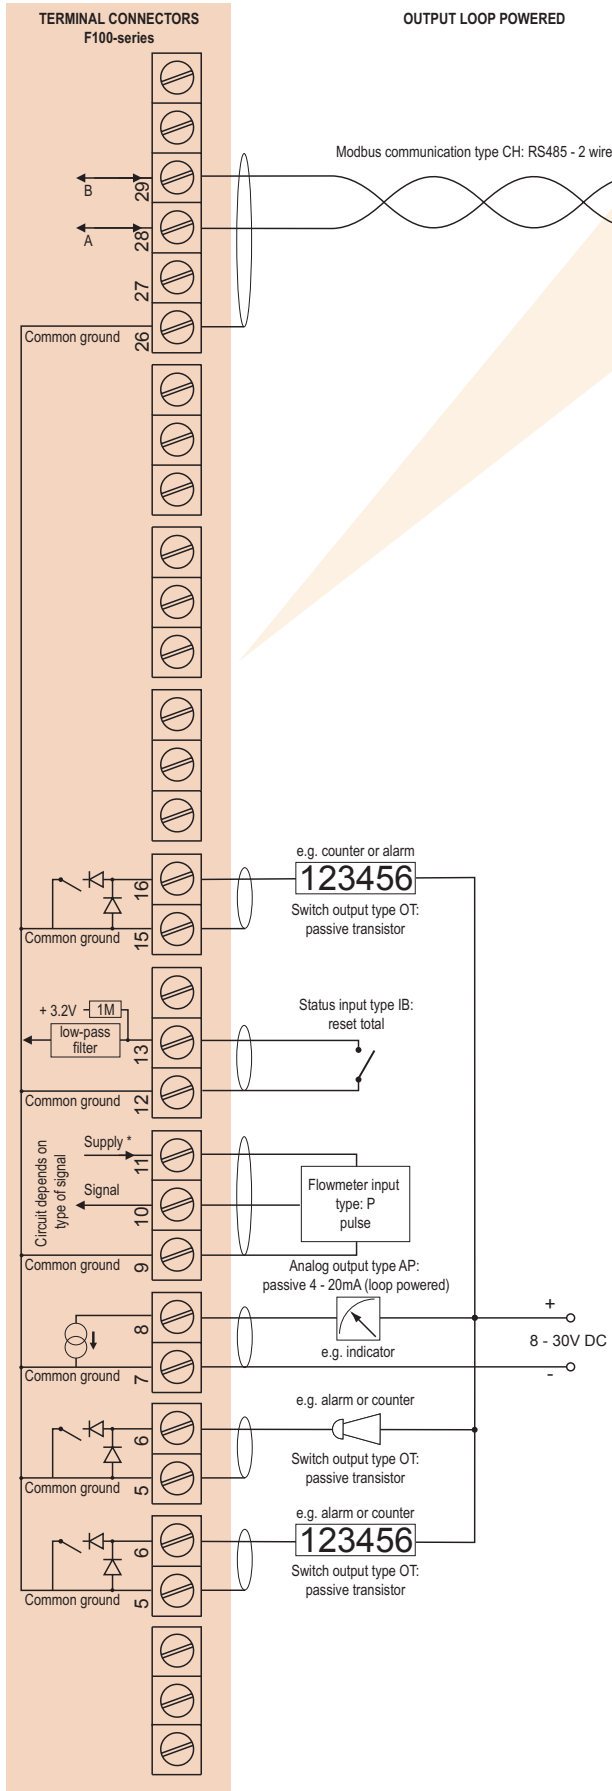


* Supply voltage: 1.2 / 3.2V DC to sensor

Typical wiring diagram F113-A-AA-CB-IB-OA-PD

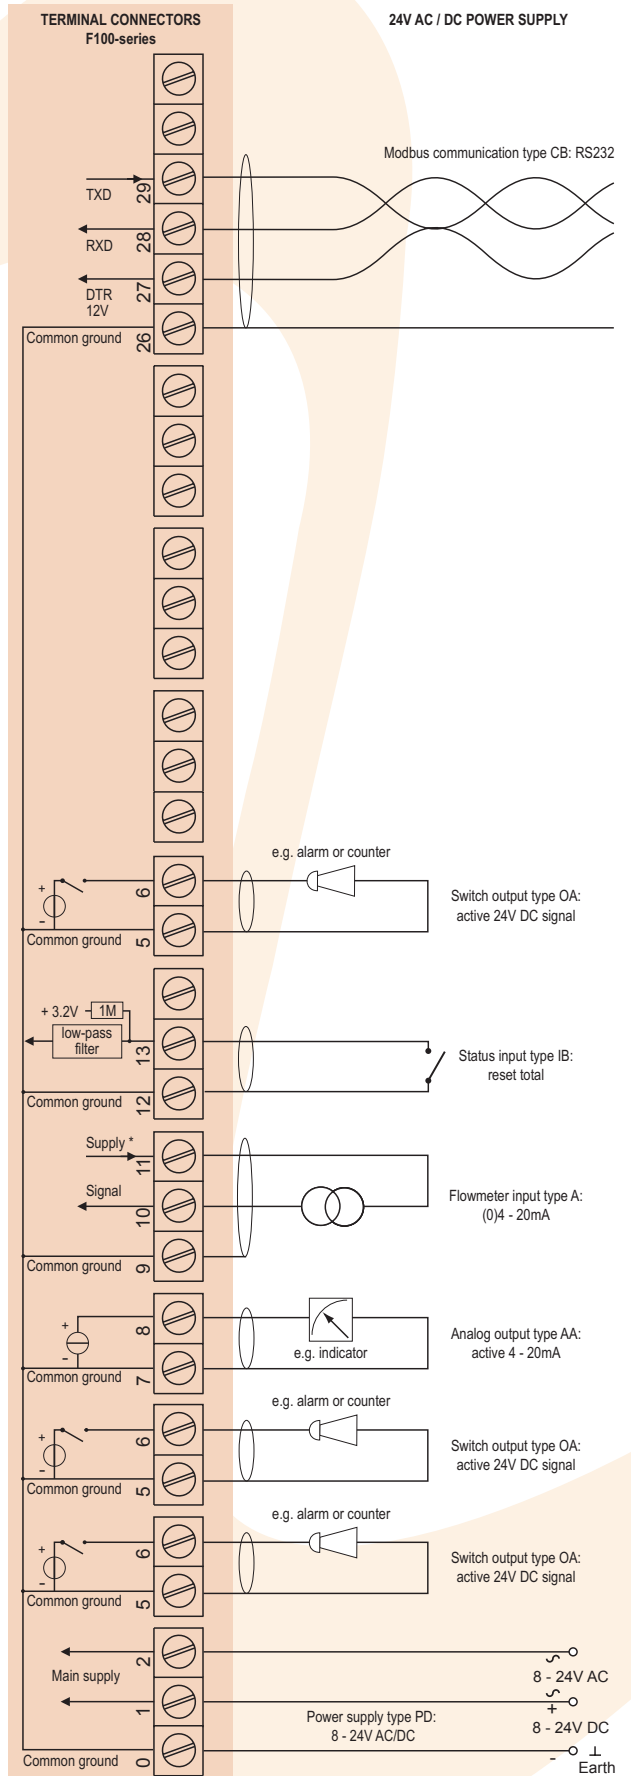


* Supply voltage: 3.2 / 8.2 / 12 / 24V DC to sensor

Typical wiring diagram F113-A-AI-CI-IB-OR-PM

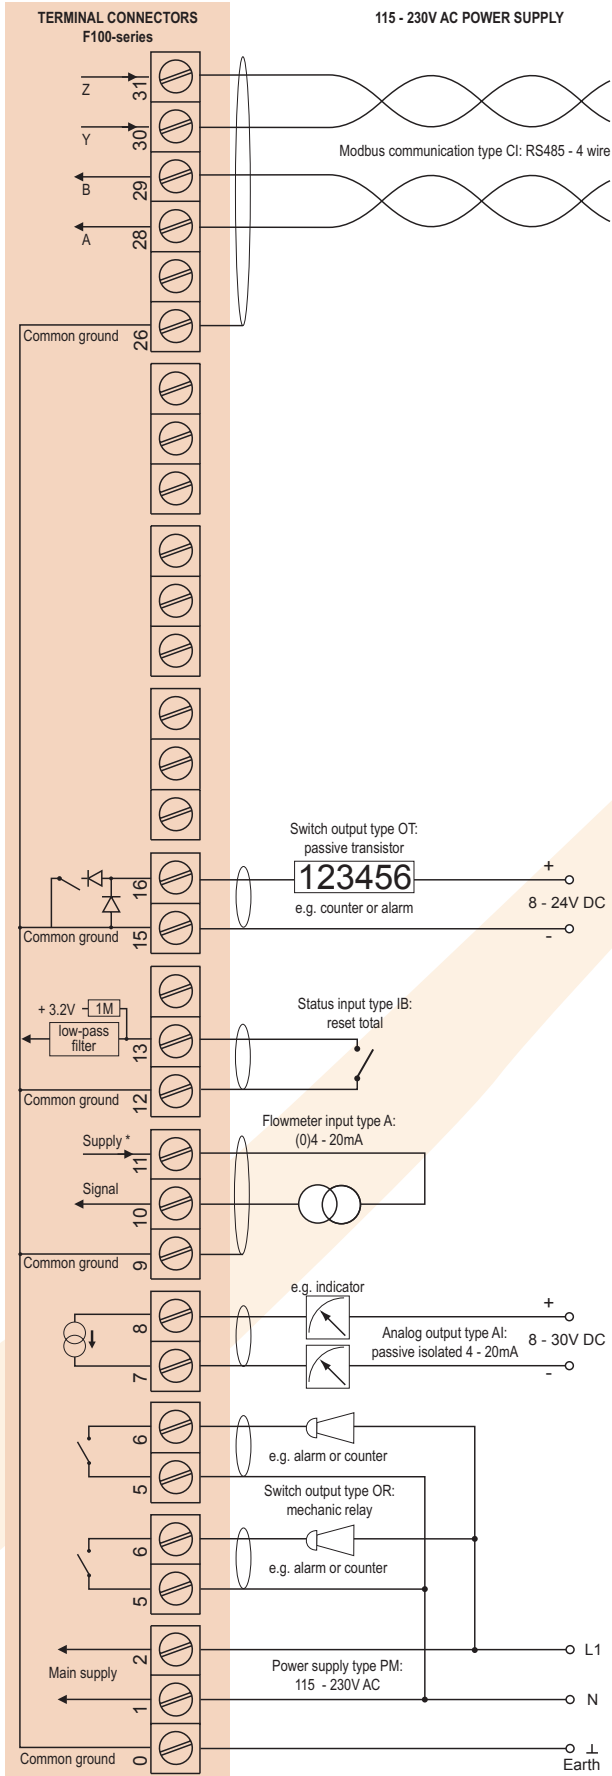



* Supply voltage: 3.2 / 8.2 / 12 / 24V DC to sensor

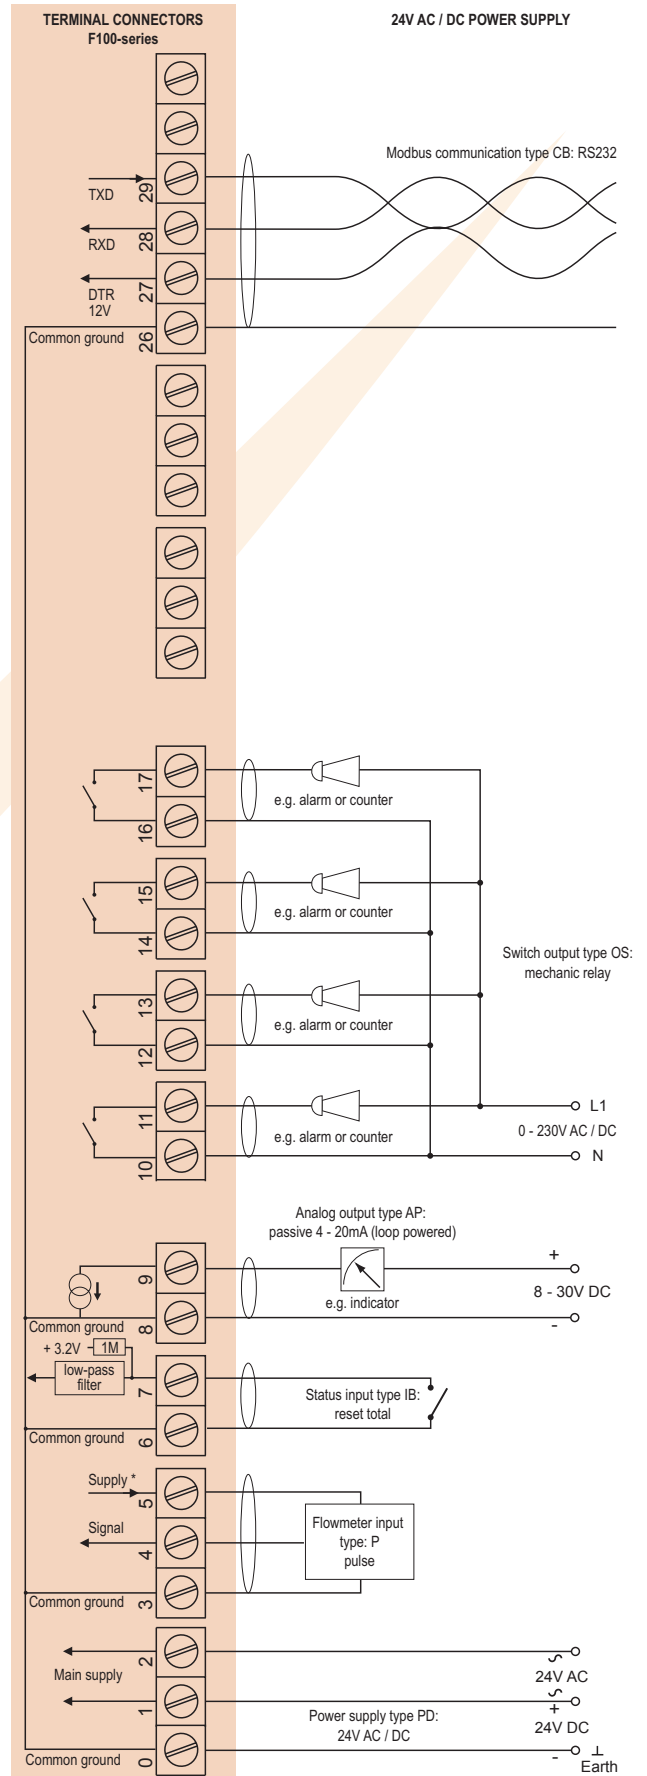Typical wiring diagram F113-P-AP-CB-IB-OS-PD




* Supply voltage: 1.2 / 3.2 / 8.2 / 12 / 24V DC to sensor

Hazardous area applications


The F113-XI has been ATEX approved by KEMA for use in Intrinsically Safe applications. It is approved according to  II 1 GD EEx ia IIB/IIC T4 T100°C for gas and dust applications with an operational temperature range of -30°C to +70°C (-22°F to +158°F). Besides the I.S. power supplies for the two alarm / pulse outputs, it is allowed to connect up to three I.S. power supplies in IIB applications or one in IIC applications. Full functionality of the F113 remains available, including two alarm or pulse outputs and 4 - 20mA output and Modbus communication (type CT). Power supply type PD-XI offers a 8.2V sensor supply e.g. for one Namur sensor. A flame proof enclosure with rating  II 2 GD EEx d IIB T5 is available as well. Please contact your supplier for further details.

Certificate of conformity KEMA 03ATEX1074 X

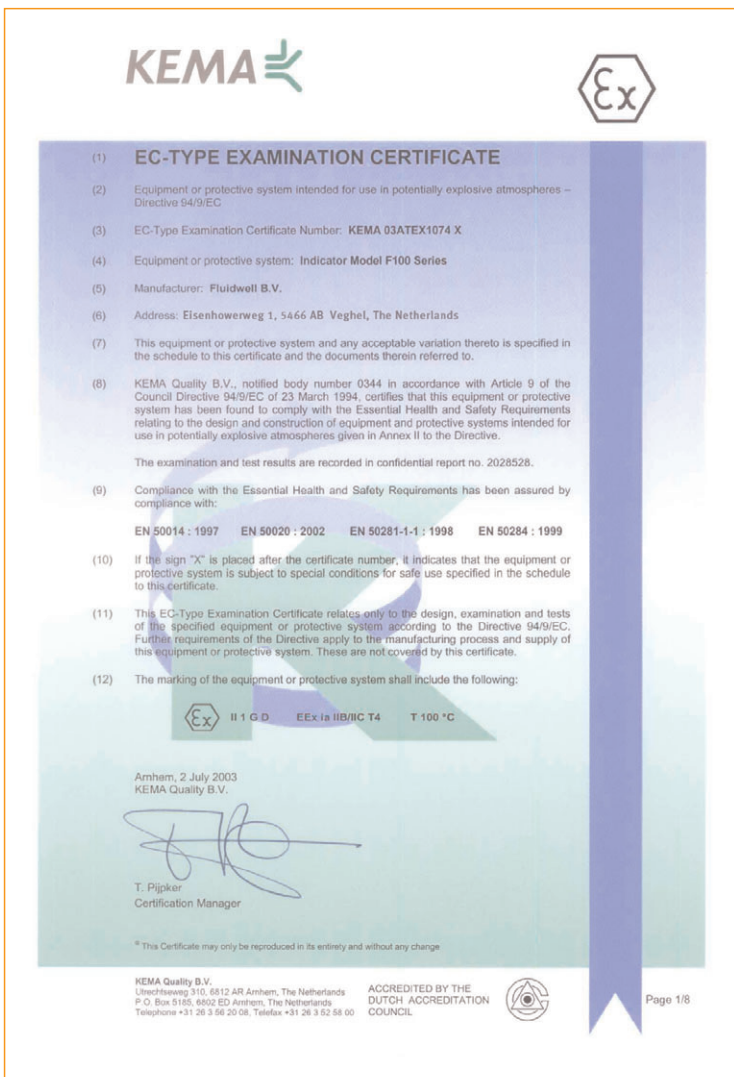


Configuration example IIB and IIC

F113-P-(AP)-(CT)-IB-(OT)-PC-XI - Battery powered unit

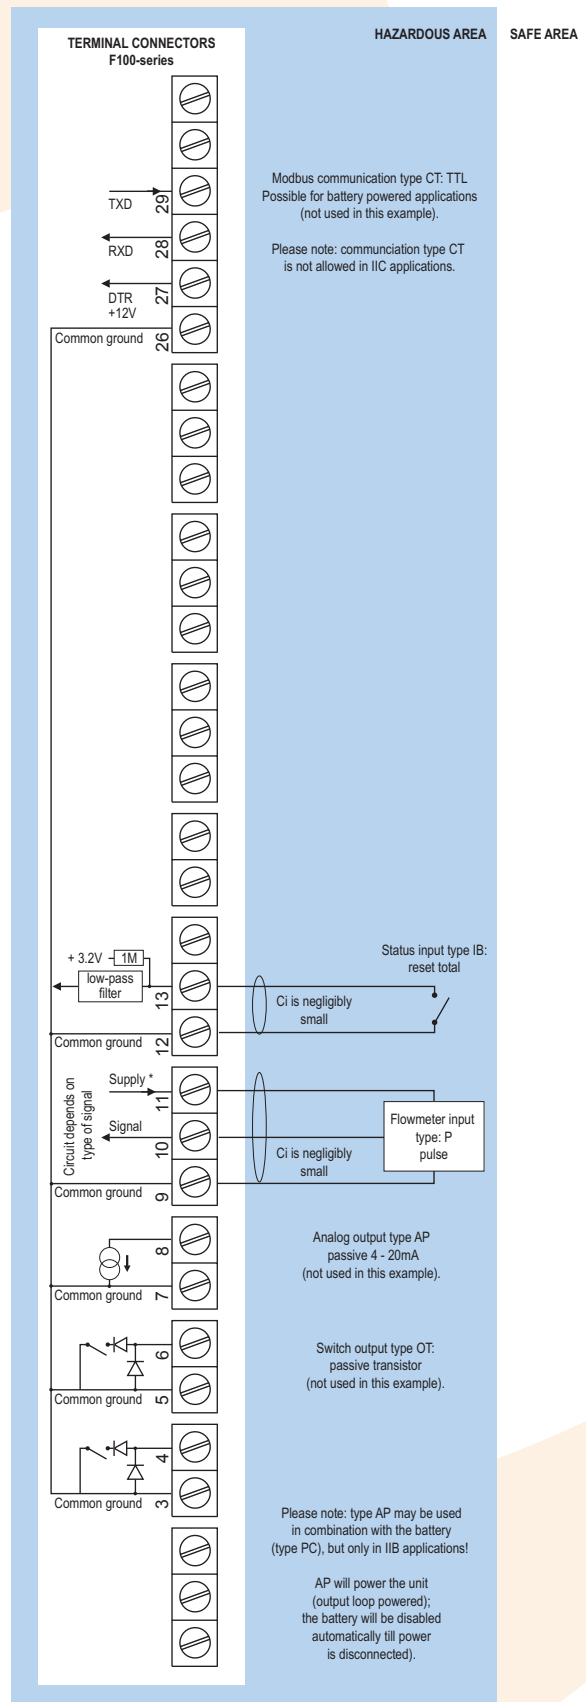


* Note sensor supply voltage: 1.2V DC for coil sensors or 3.2V DC for other pulse sensors.

Configuration example IIB and IIC - F113-P-AP-(CT)-IB-OT-PX-XI - Output loop powered

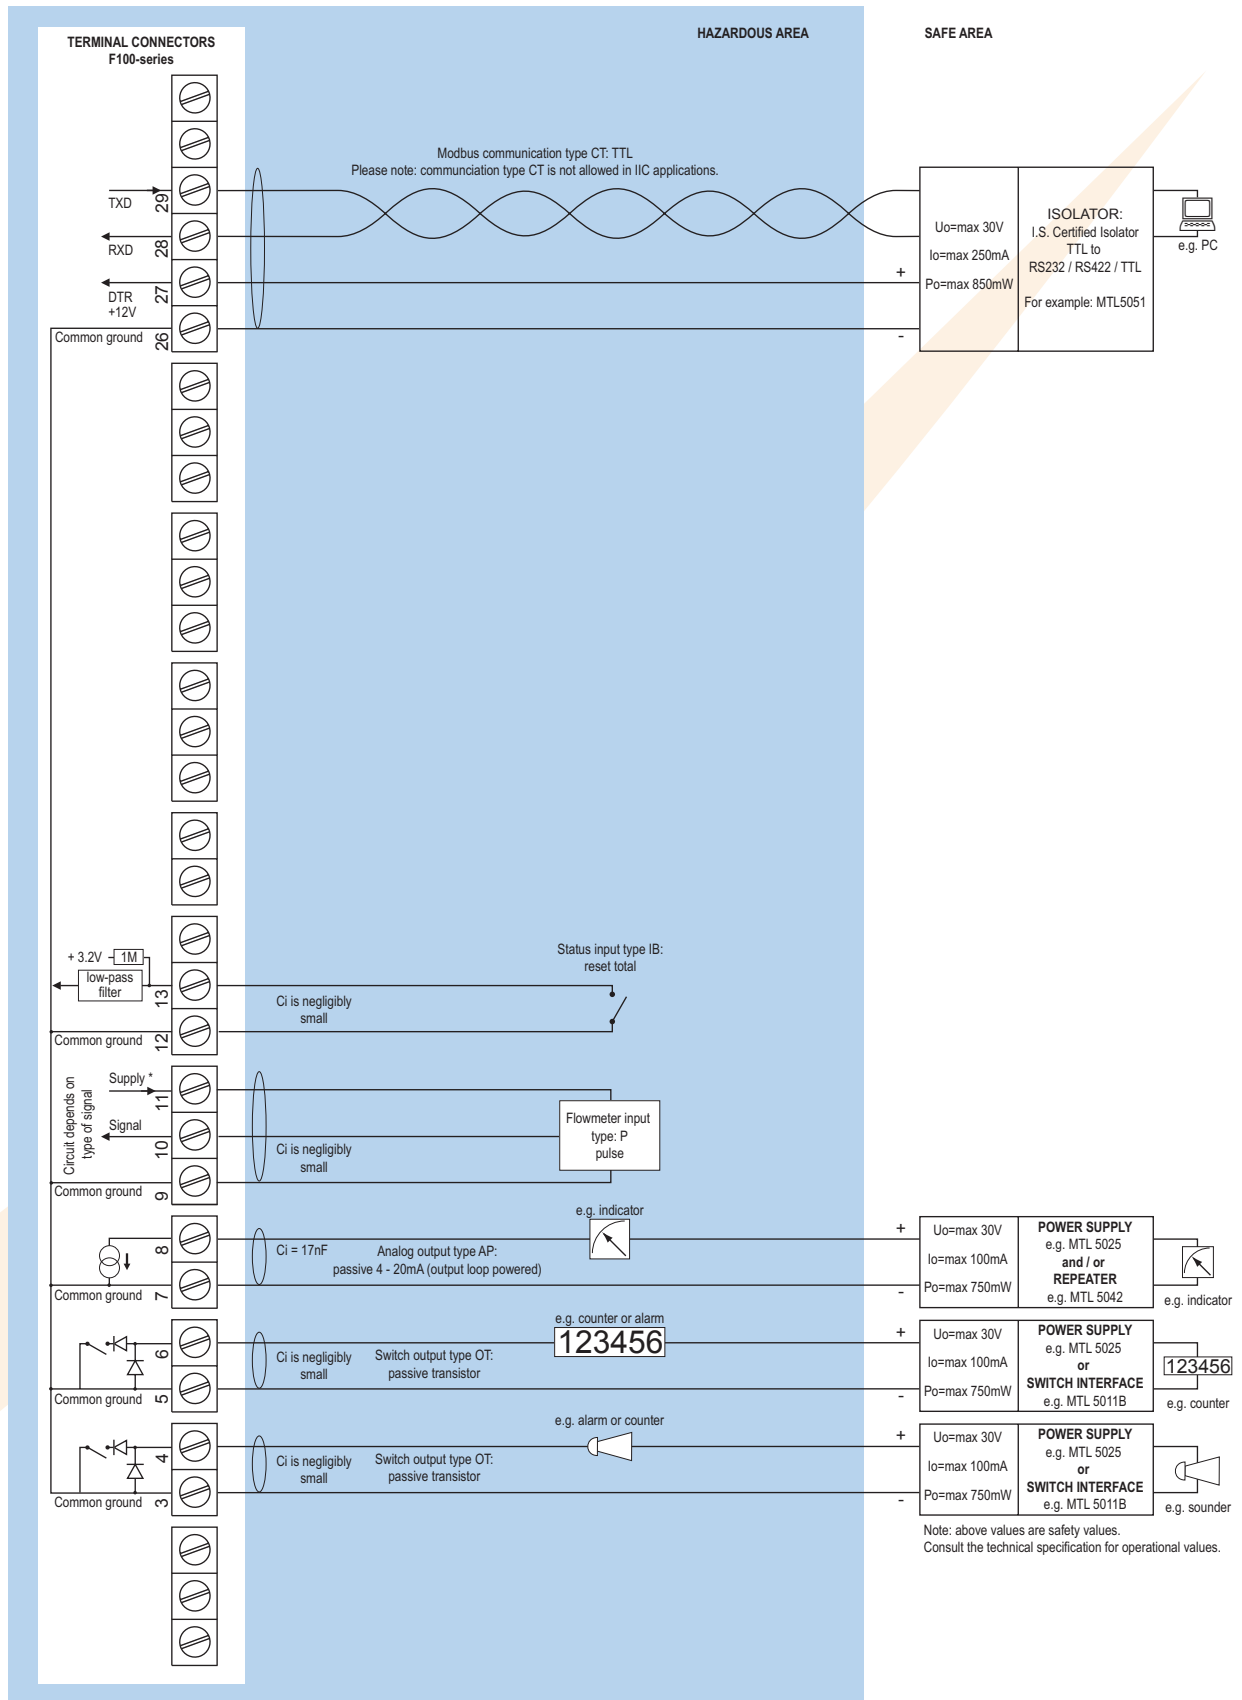


* Note sensor supply voltage: 1.2V DC for coil sensors or 3.2V DC for other pulse sensors.

Configuration example IIB and IIC - F113-A-AF-(CT)-IB-OT-PD-XI - Power supply 16 - 30V DC

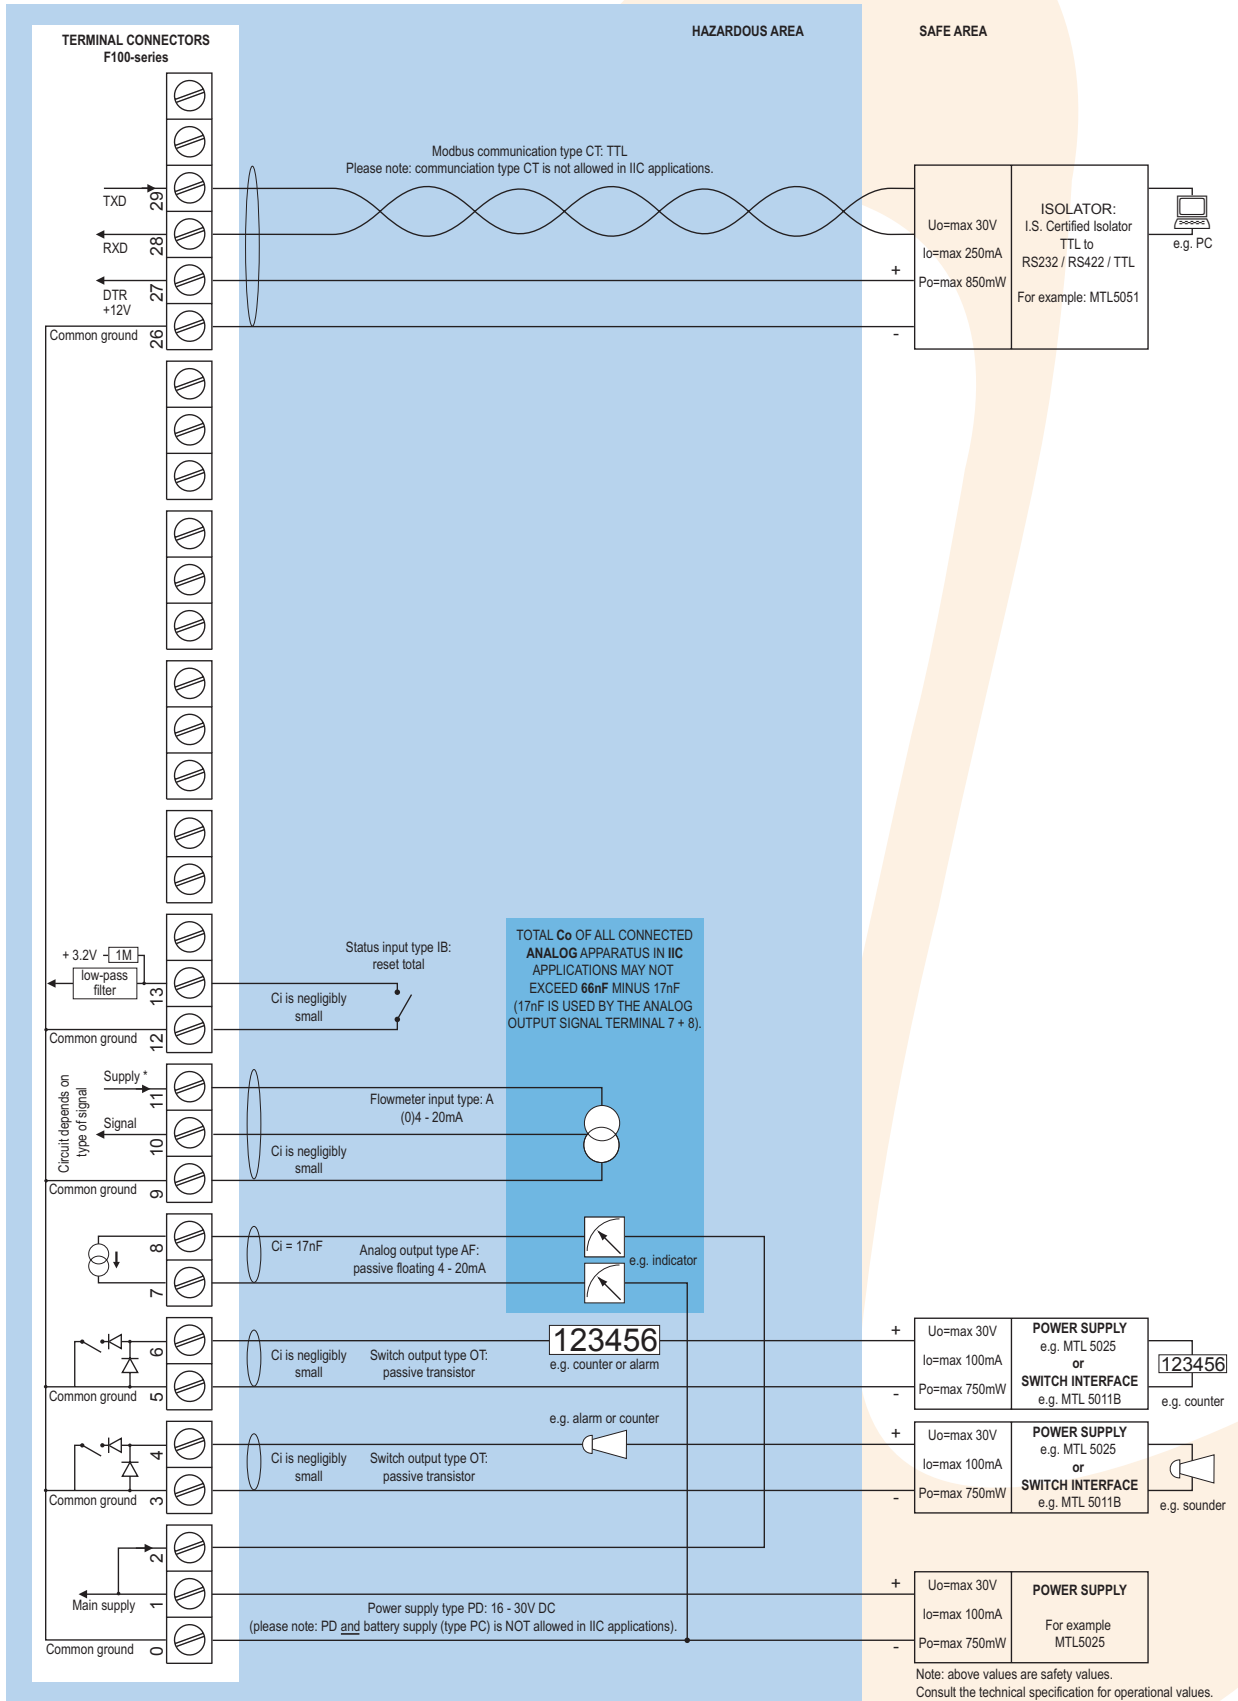

* Note power supply type PD: the supply voltage to pulse sensors is maximum 8.7V (U_o=max 8.7V I_o=max 25mA P_o=max 150mW) and to analog sensors as connected to terminal 1 (internally linked).

Configuration example IIB - F113-A-AF-CT-IB-OT-(PC)-(PD)-(PL)-XI - Power supply 16 - 30V DC, battery or loop powered

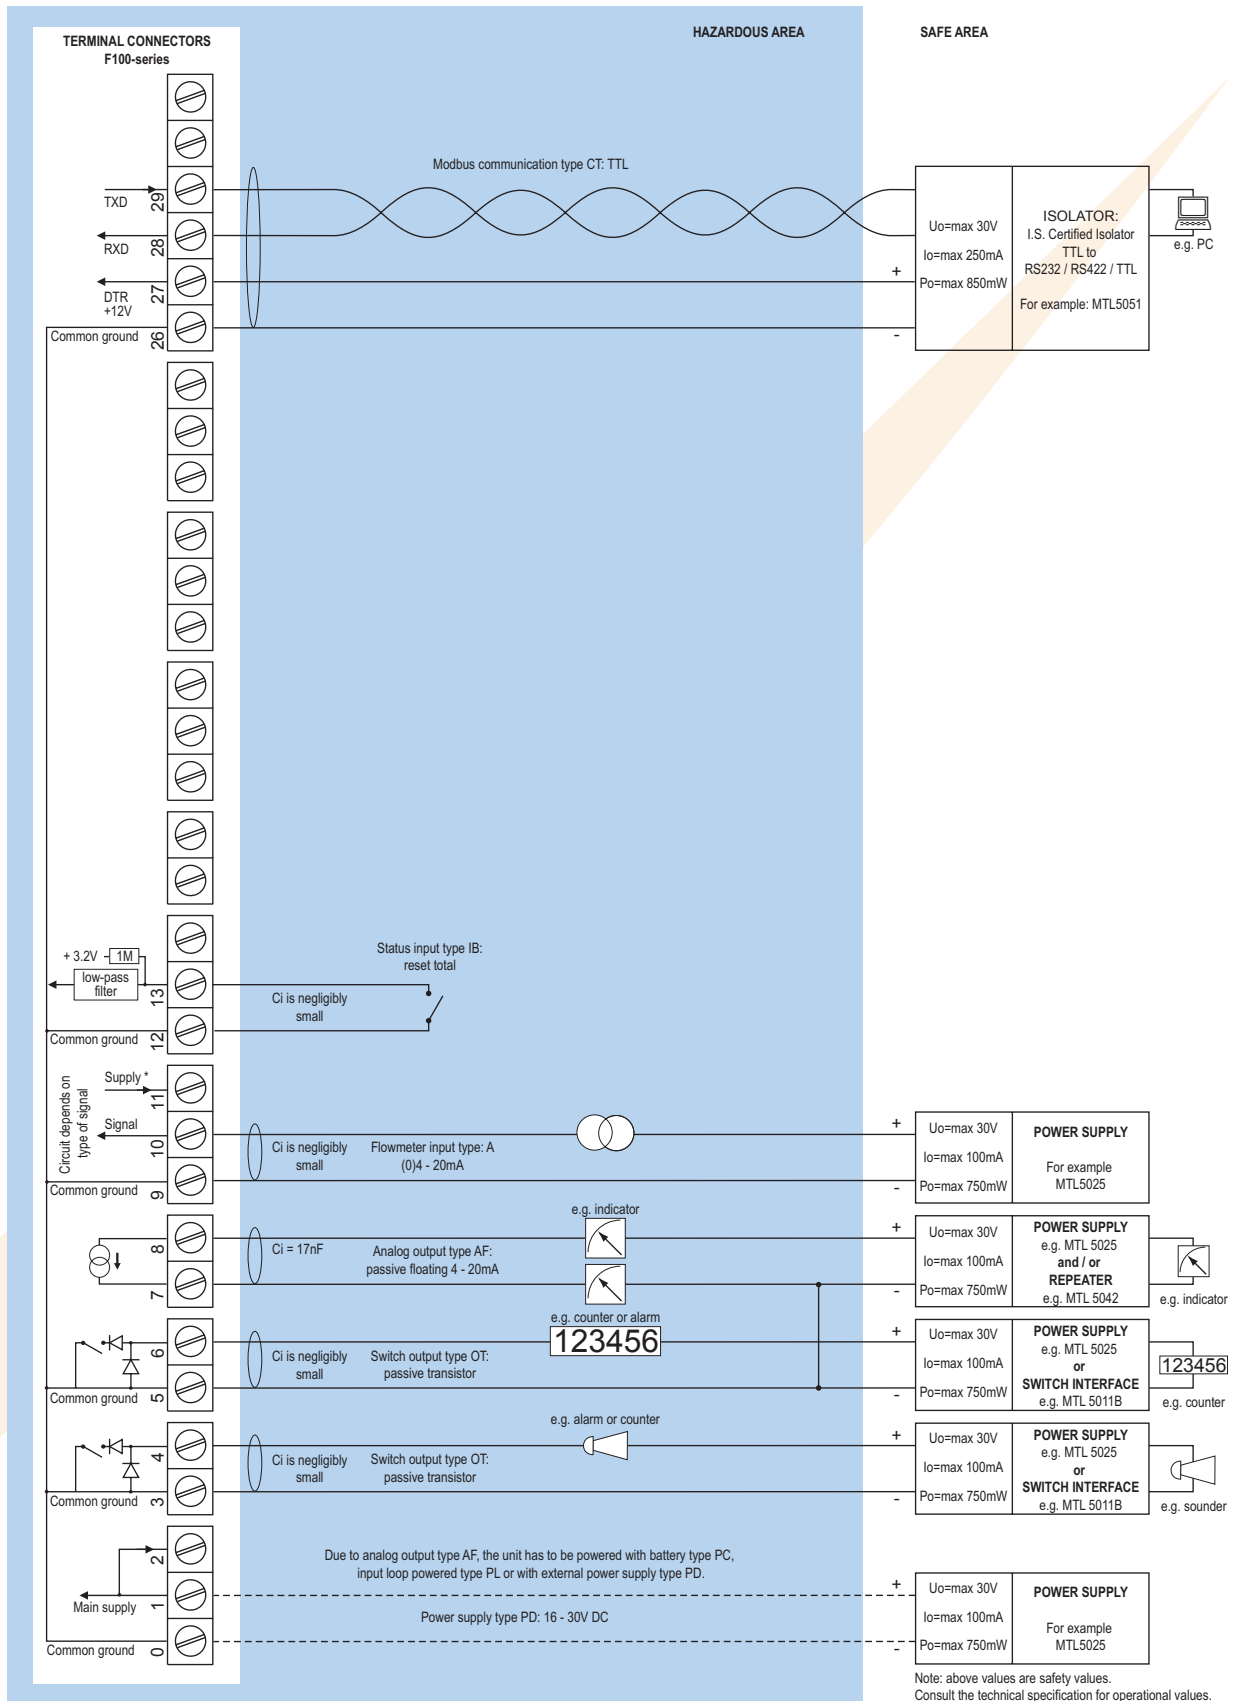

* Note power supply type PD: the supply voltage to pulse sensors is maximum 8.7V (U_o=max 8.7V I_o=max 25mA P_o=max 150mW) and to analog sensors as connected to terminal 1 (internally linked).

Technical specification

General

| Display | |
|--------------|--|
| Type | High intensity reflective numeric and alphanumeric LCD, UV-resistant. |
| Dimensions | 90 x 40mm (3.5" x 1.6"). |
| Digits | Seven 17mm (0.67") and eleven 8mm (0.31") digits. Various symbols and measuring units. |
| Refresh rate | User definable: 8 times/sec. - 30 secs. |
| Option ZB | Transflective LCD with green LED backlight. Good readings in full sunlight and darkness. |
| Note ZB | Only available for safe area applications. |

Operating temperature

| | |
|--------------------|-----------------------------------|
| Operational | -30°C to +80°C (-22°F to +178°F). |
| Intrinsically Safe | -30°C to +70°C (-22°F to +158°F). |

Power requirements

| | |
|---------------|---|
| Type PB | Long life Lithium battery - life-time depends upon settings and configuration - up to 5 years. |
| Type PC | Intrinsically Safe long life lithium battery - life-time depends upon settings and configuration - up to 5 years. |
| Type PD | 8 - 24V AC / DC ± 10%. Power consumption max. 10 Watt. Intrinsically Safe: 16 - 30V DC; power consumption max. 0.75 Watt. |
| Type PF | 24V AC / DC ± 10%. Power consumption max. 15 Watt. |
| Type PL | Input loop powered from sensor signal 4 - 20mA (type "A") - requires types AI or AF and OT. |
| Type PM | 115 - 230V AC ± 10%. Power consumption max. 15 Watt. |
| Type PX | 8 - 30V DC. Power consumption max. 0.5 Watt. |
| Type ZB | 12 - 24V DC ± 10% or type PD / PF / PM. Power consumption max. 1 Watt. |
| Note PB/PF/PM | Not available Intrinsically Safe. |
| Note PF/PM | The total consumption of the sensors and outputs may not exceed 400mA @ 24V. |
| Note | For Intrinsically Safe applications, consult the safety values in the certificate. |

Sensor excitation

| | |
|---------------|---|
| Type PB/PC/PX | 3.2V DC for pulse signals and 1.2V DC for coil pick-up. |
| Note | This is not a real sensor supply. Only suitable for sensors with a very low power consumption like coils (sine wave) and reed-switches. |
| Type PD | 1.2 / 3.2 / 8.2 / 12 / 24V DC - max. 50mA @ 24V DC. |
| Type PD-XI | 1.2 / 3.2 / 8.2V DC - max. 7mA @ 8.2V DC and mains power supply voltage (as connected to terminal 1). |
| Note | In case PD-XI and signal A or U: the sensor supply voltage is according to the power supply voltage connected to terminal 1. Also terminal 2 offers the same voltage. |
| Type PF / PM | 1.2 / 3.2 / 8.2 / 12 / 24V DC - max. 400mA @ 24V DC. |

Terminal connections

| | |
|------|---|
| Type | Removable plug-in terminal strip. Wire max. 1.5mm ² and 2.5mm ² . |
|------|---|

Data protection

| | |
|-----------|---|
| Type | EEPROM backup of all settings. Backup of running totals every minute. Data retention at least 10 years. |
| Pass-code | Configuration settings can be pass-code protected. |

Hazardous area

| | |
|--------------------|---|
| Intrinsically Safe | ATEX approval ref.: II 1 GD EEx ia IIB/IIC T4 T100°C. |
| Type XI | Maximum ambient +70°C (158°F). |
| Explosion proof | ATEX approval ref.: II 2 GD EEx d IIB T5. |
| Type XF | Dimensions of enclosure: 300 x 250 x 200mm (11.8" x 9.9" x 7.9") L x H x D. |
| Weight | appr. 15 Kg. |

Environment

| | |
|-------------------------------|--|
| Electromagnetic compatibility | Compliant ref: EN 61326 (1997), EN 61010-1 (1993). |
|-------------------------------|--|

Casing

General

| | |
|--------------|---|
| Window | Polycarbonate window. |
| Sealing | Silicone. |
| Control keys | Three industrial micro-switch keys. UV-resistant silicone keypad. |

Aluminum wall / field mount enclosures

| | |
|------------|--|
| General | Die-cast aluminum wall/field mount enclosure IP67 / NEMA 4X with 2-component UV-resistant coating. |
| Dimensions | 130 x 120 x 75mm (5.12" x 4.72" x 2.95") - W x H x D. |
| Weight | 1100 gr. |
| Type HA | Cable entry: 2 x PG9 and 1 x M20. |
| Type HM | Cable entry: 2 x M16 and 1 x M20. |
| Type HN | Cable entry: 1 x M20. |
| Type HO | Cable entry: 2 x M20. |
| Type HP | Cable entry: 6 x M12. |
| Type HT | Cable entry: 1 x 1/2" NPT. |
| Type HU | Cable entry: 3 x 1/2" NPT. |
| Type HZ | Cable entry: no holes. |

GRP wall / field mount enclosures

| | |
|------------|--|
| General | GRP wall/field mount enclosure IP67 / NEMA 4X, UV-resistant and flame retardant. |
| Dimensions | 130 x 120 x 75mm (5.12" x 4.72" x 2.95") - W x H x D. |
| Weight | 600 gr. |
| Type HD | Cable entry: no holes. |
| Type HE | Cable entry: 2 x Ø 16mm and 1 x Ø 20mm. |
| Type HF | Cable entry: 1 x Ø 22mm (7/8"). |
| Type HG | Cable entry: 2 x Ø 20mm. |
| Type HH | Cable entry: 6 x Ø 12mm. |
| Type HJ | Cable entry: 3 x Ø 22mm (7/8"). |
| Type HK | Flat bottom, cable entry: no holes. |

Panel mount enclosures

| | |
|---------------|--|
| Dimensions | 130 x 120 x 60mm (5.12" x 4.72" x 2.36") - W x H x D. |
| Panel cut-out | 115 x 98mm (4.53" x 3.86") L x H. |
| Type HB | Die-cast aluminum panel mount enclosure IP65 / NEMA 4. |
| Weight | 600 gr. |
| Type HC | GRP panel mount enclosure IP65 / NEMA 4, UV-resistant and flame retardant. |
| Weight | 450 gr. |

ABS wall / field mount enclosures

| | |
|------------|--|
| General | Silicone free ABS wall/field mount enclosure IP65 with EPDM and PE sealings. UV-resistant polyester keypad (old HD enclosure). |
| Dimensions | 130 x 114 x 71mm (5.1" x 4.5" x 2.8") - W x H x D. |
| Weight | 450 gr. |
| Type HS | Cable entry: no holes. |

Signal inputs

| Flowmeter | |
|-----------------|---|
| Type P | Coil / sine wave (minimum 20mVpp or 80mVpp - sensitivity selectable), NPN/PNP, open collector, reed-switch, Namur, active pulse signals 8 - 12 and 24V DC. |
| Frequency | Minimum 0Hz - maximum 7kHz for total and flow rate. Maximum frequency depends on signal type and internal low-pass filter. E.g. reed switch with low-pass filter: max. frequency 120Hz. |
| K-Factor | 0.000010 - 9,999,999 with variable decimal position. |
| Low-pass filter | Available for all pulse signals. |
| Option ZF | coil sensitivity 10mVpp. |
| Type A | (0)4 - 20mA. Analog input signal can be scaled to any desired range within 0 - 20mA. |
| Type U | 0 - 10V DC. Analog input signal can be scaled to any desired range within 0 - 10V DC. |
| Accuracy | Resolution: 14 bit. Error < 0.025mA / \pm 0.125% FS. Low level cut-off programmable. |
| Span | 0.000010 - 9,999,999 with variable decimal position. |
| Update time | Four times per second. |
| Voltage drop | Type A: 2.5V @ 20mA. |
| Load impedance | Type U: 3k Ω . |
| Relationship | Linear and square root calculation. |
| Note | For signal type A and U: external power to sensor is required; e.g. type PD. |

Signal outputs

| Analog output | |
|---------------|--|
| Function | Transmitting flow rate. |
| Accuracy | 10 bit. Error < 0.05%. Analog output signal can be scaled to any desired range. |
| Update time | Ten times per second. |
| Type AA | Active 4 - 20mA output (requires OA + PD, PF or PM). |
| Type AB | Active 0 - 20mA output (requires OA + PD, PF or PM). |
| Type AF | Passive floating 4 - 20mA output for Intrinsically Safe applications (requires PC, PL or PD). |
| Type AI | Passive galvanically isolated 4 - 20mA output - also available for battery powered models (requires PB, PD, PF, PL or PM). |
| Type AP | passive 4 - 20mA output - not isolated. Unit will be loop powered. |
| Type AU | Active 0 - 10V DC output (requires OA + PD, PF or PM). |

Alarm /pulse output

| | |
|-----------|--|
| Function | All outputs are user defined: pulse output or low, low-low, high, high-high or all alarms output. |
| Frequency | Max. 64Hz. Pulse length user definable between 7.8 msec up to 2 seconds. |
| Type OA | Three active 24V DC transistor outputs (PNP); max. 50mA per output (requires AA + PD, PF or PM). |
| Type OR | Two electro-mechanical relay outputs - isolated (N.O.) - max. switch power 230V AC - 0.5A (requires PF or PM) and one transistor output OA or OT (OA in combination with AA only). |
| Type OS | Four electro-mechanical relay outputs - isolated N.O.); max. switch power 230V AC - 0.5A per relay (requires AP + PD with 24V AC / DC). |
| Type OT | Three passive transistor outputs (NPN) - not isolated. Max. 50V DC - 300mA per output. |
| Note | Intrinsically Safe applications: only two transistor outputs type OT available. |

Communication option

| | |
|------------|--|
| Function | Reading display information, reading / writing all configuration settings. |
| Protocol | Modbus ASCII / RTU. |
| Speed | 1200 - 2400 - 4800 - 9600 baud. |
| Addressing | Maximum 255 addresses. |
| Type CB | RS232 |
| Type CH | RS485 2-wire |
| Type CI | RS485 4-wire |
| Type CT | TTL Intrinsically Safe. |

Operational

Operator functions

| | |
|---------------------|---|
| Displayed functions | <ul style="list-style-type: none"> Flow rate and / or total. Total and accumulated total. Low-low alarm value. Low alarm value. High alarm value. High-high alarm value. Total can be reset to zero by pressing the CLEAR-key twice. Alarm values can be set (or only displayed). |
|---------------------|---|

Total

| | |
|----------|---|
| Digits | 7 digits. |
| Units | L, m ³ , GAL, USGAL, KG, lb, bbl, no unit. |
| Decimals | 0 - 1 - 2 or 3. |
| Note | Total can be reset to zero. |

Accumulated total

| | |
|------------------|-----------------------------------|
| Digits | 11 digits. |
| Units / decimals | According to selection for total. |
| Note | Can not be reset to zero. |

Flow rate

| | |
|------------|--|
| Digits | 7 digits. |
| Units | mL, L, m ³ , Gallons, KG, Ton, lb, bl, cf, RND, ft ³ , scf, Nm ³ , NI, igal - no units. |
| Decimals | 0 - 1 - 2 or 3. |
| Time units | /sec - /min - /hr - /day. |

Alarm values

| | |
|---------------|--|
| Digits | 7 digits. |
| Units | According to selection for flow rate. |
| Decimals | According to selection for flow rate. |
| Time units | According to selection for flow rate. |
| Type of alarm | Low, high, low-low or high-high flow rate alarm. Includes delay time alarm and configurable alarm outputs. |

Accessories

Mounting accessories

| | |
|-------|--|
| ACFo2 | Stainless steel wall mounting kit. |
| ACFo5 | Stainless steel pipe mounting kit (worm gear clamps not included). |
| ACFo6 | Two stainless steel worm gear clamps \varnothing 44 - 56mm. |
| ACFo7 | Two stainless steel worm gear clamps \varnothing 58 - 75mm. |
| ACFo8 | Two stainless steel worm gear clamps \varnothing 77 - 95mm. |
| ACFo9 | Two stainless steel worm gear clamps \varnothing 106 - 138mm. |
| ACF10 | Customized Grevopal tagplates for ACFo2 and ACFo5, including stainless steel screws. Dimension: 95mm x 12.5mm (3.75" x 0.50"). |

Ordering information

Standard configuration: F113-P-AP-CX-EX-HC-IX-OT-PX-TX-XX-ZX.

| Ordering information: | F113 | - | A | -C | -EX | -H | -I | -O | -P | -TX | -X | -Z |
|---|------|---|---|----|-----|----|----|----|----|-----|----|----|
| Flowmeter input signal | | | | | | | | | | | | |
| A | ⊗ | | (0)4 - 20mA input. | | | | | | | | | |
| P | ⊗ | | Pulse input: coil, npn, pnp, namur, reed-switch. | | | | | | | | | |
| U | ⊗ | | 0 - 10V DC input. | | | | | | | | | |
| Analog output signal | | | | | | | | | | | | |
| AA | | | Active 4 - 20mA output - requires OA + PD, PF or PM. | | | | | | | | | |
| AB | | | Active 0 - 20mA output - requires OA + PD, PF or PM. | | | | | | | | | |
| AF | ⊗ | | I.S. floating 4 - 20mA output - requires PC, PL or PD. | | | | | | | | | |
| AI | | | Isolated 4 - 20mA output - requires PB, PD, PF, PL or PM. | | | | | | | | | |
| AP | ⊗ | | Passive 4 - 20mA output, loop powered unit. | | | | | | | | | |
| AU | | | Active 0 - 10V DC output - requires OA + PD, PF or PM. | | | | | | | | | |
| Communication | | | | | | | | | | | | |
| CB | | | Communication RS232 - Modbus ASCII / RTU. | | | | | | | | | |
| CH | | | Communication RS485 - 2-wire - Modbus ASCII / RTU. | | | | | | | | | |
| CI | | | Communication RS485 - 4-wire - Modbus ASCII / RTU. | | | | | | | | | |
| CT | ⊗ | | Intrinsically Safe TTL - Modbus ASCII / RTU. | | | | | | | | | |
| CX | ⊗ | | No communication. | | | | | | | | | |
| Flow equations | | | | | | | | | | | | |
| EX | ⊗ | | No flow equations. | | | | | | | | | |
| Panel mount enclosures - IP65 / NEMA4 | | | | | | | | | | | | |
| HB | ⊗ | | Aluminum enclosure. | | | | | | | | | |
| HC | ⊗ | | GRP enclosure. | | | | | | | | | |
| GRP field / wall mount enclosures - IP67 / NEMA4X | | | | | | | | | | | | |
| HD | ⊗ | | Cable entry: no holes. | | | | | | | | | |
| HE | ⊗ | | Cable entry: 2 x Ø 16mm & 1 x Ø 20mm. | | | | | | | | | |
| HF | ⊗ | | Cable entry: 1 x Ø 22mm (7/8"). | | | | | | | | | |
| HG | ⊗ | | Cable entry: 2 x Ø 20mm. | | | | | | | | | |
| HH | ⊗ | | Cable entry: 6 x Ø 12mm. | | | | | | | | | |
| HJ | ⊗ | | Cable entry: 3 x Ø 22mm (7/8"). | | | | | | | | | |
| HK | ⊗ | | Flat bottom, cable entry: no holes. | | | | | | | | | |
| Aluminum field / wall mount enclosures - IP67 / NEMA4X | | | | | | | | | | | | |
| HA | ⊗ | | Cable entry: 2 x PG9 + 1 x M20. | | | | | | | | | |
| HM | ⊗ | | Cable entry: 2 x M16 + 1 x M20. | | | | | | | | | |
| HN | ⊗ | | Cable entry: 1 x M20. | | | | | | | | | |
| HO | ⊗ | | Cable entry: 2 x M20. | | | | | | | | | |
| HP | ⊗ | | Cable entry: 6 x M12. | | | | | | | | | |
| HT | ⊗ | | Cable entry: 1 x 1/2"NPT. | | | | | | | | | |
| HU | ⊗ | | Cable entry: 3 x 1/2"NPT. | | | | | | | | | |
| HZ | ⊗ | | Cable entry: no holes. | | | | | | | | | |
| ABS field / wall mount enclosures | | | | | | | | | | | | |
| HS | ⊗ | | Silicone free ABS field enclosure IP65 – Cable entry: no holes (old HD enclosure). | | | | | | | | | |
| Inputs | | | | | | | | | | | | |
| IB | ⊗ | | Terminal input to reset total. | | | | | | | | | |
| IX | ⊗ | | No external input. | | | | | | | | | |
| Outputs | | | | | | | | | | | | |
| OA | | | Three active transistor outputs - requires AA, AB or AU and PD, PF or PM. | | | | | | | | | |
| OR | | | Two mechanical relay outputs + one OA or OT - requires PF or PM. | | | | | | | | | |
| OS | | | Four mechanical relay outputs - requires AP + PD. | | | | | | | | | |
| OT | ⊗ | | Three passive transistor outputs - standard configuration. | | | | | | | | | |
| Power supply | | | | | | | | | | | | |
| PB | | | Lithium battery powered. | | | | | | | | | |
| PC | ⊗ | | Lithium battery powered - Intrinsically Safe. | | | | | | | | | |
| PD | ⊗ | | 8 - 24V AC/DC + sensor supply - with XI: 16 - 30V DC. | | | | | | | | | |
| PF | | | 24V AC/DC + sensor supply. | | | | | | | | | |
| PL | ⊗ | | Input loop powered from sensor signal type "A" - requires AF or AI and OT. | | | | | | | | | |
| PM | | | 115 - 230V AC + sensor supply. | | | | | | | | | |
| PX | ⊗ | | Basic power supply 8 - 30V DC (no real sensor supply). Unit requires external loop AP. | | | | | | | | | |
| Temperature input signal | | | | | | | | | | | | |
| TX | ⊗ | | No temperature input signal. | | | | | | | | | |
| Hazardous area | | | | | | | | | | | | |
| XI | ⊗ | | Intrinsically Safe. | | | | | | | | | |
| XF | | | EExd enclosure - 3 keys. | | | | | | | | | |
| XX | | | Safe area only. | | | | | | | | | |
| Other options | | | | | | | | | | | | |
| ZB | | | Backlight. | | | | | | | | | |
| ZF | ⊗ | | Coil input 10mVpp. | | | | | | | | | |
| ZX | ⊗ | | No options. | | | | | | | | | |

The bold marked text contains the standard configuration.

⊗ Available Intrinsically Safe.

Specifications are subject to change without notice.