
	REVISIONS						
REV	DESCRIPTION	CHG.NO.	APP'D	DATE			
AA	NEW RELEASE	EC004733	DRV	1/16/04			

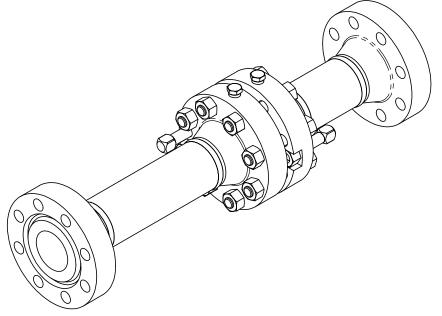

*UNLESS OTHERWISE SPECIFIED DIMENSIONS IN INCHES (MM)	٦	YPE I		R	DSEM	OUNT	■ ®	BOULDER, COLORADO
*ALL DIMENSIONS ARE NOMINAL	DR.	DMK	12/17/03	TITLE	DIMENSION	NAL DRAWI	NG FO	OR MODEL
AND ARE FOR REFERENCE ONLY	APP	ROVAL		1497 RING JOINT, WELD NECK			CK	
<u> </u>	DRAWING	K. GREEN	12/19/03		ORIFICE M	ETER SECT	LION	
EMERSON.	TAGGING			SIZE A		DRAWING NO	014	97-1002
Process Management	SPECIALS			SCAL	E: NONE		SHEET	1 OF 11

NOTES:

- ROSEMOUNT INC. CERTIFIES THIS DRAWING IS IN ACCORDANCE WITH ROSEMOUNT ENGINEERING SPECIFICATIONS AND ACCURATELY REPRESENTS THE EQUIPMENT FURNISHED.
- 2. ORIFICE FLANGE UNIONS MEET THE REQUIREMENTS OR ANSI B16.36.
- 3. FOR MODEL SELECTIONS, MATERIALS, AND OPTIONS, REFER TO ROSEMOUNT PRODUCT DATA SHEET 00813-0100-4792.
- 4. MODEL 1497 MAXIMUM TEMPERATURE IS 850°F. MAXIMUM OPERATING TEMPERATURE MAY BE REDUCED DEPENDING ON MATERIAL AND GASKET SELECTIONS. REFER TO ROSEMOUNT PRODUCT DATA SHEET 00813-0100-4792 FOR DETAILS.
- 5. MODEL 1497 INCLUDES FLANGE UNIONS, STUDS, NUTS, JACK SCREWS, AND PLUGS (PLUGS ARE NOT SUPPLIED WITH SOCKET TAP FLANGES).
- 6. LENGTHS IN TABLE 1 DO NOT INCLUDE ORIFICE PLATE OR PLATE HOLDER. ACTUAL LENGTHS MAY VARY DEPENDING ON ACTUAL PLATE THICKNESS.
- 7. RING JOINT PLATE HOLDER MUST BE ORDERED WITH THE 1495 ORIFICE PLATE ASSEMBLY.

TABLE 1

LINE SIZE	UPSTREAM LENGTH (USL)	DOWNSTREAM LENGTH (DSL)			
		W/O TEMP TAP	W/TEMP TAP		
2"	21.0	11.0	17.0		
2-1/2"	26.0	12.0	21.0		
3"	32.0	16.0	24.0		
4"	41.0	21.0	33.0		
6"	62.0	30.0	48.0		
8"	81.0	40.0	64.0		
10"	101.0	51.0	82.0		
12"	120.0	60.0	96.0		
14"	134.0	66.0	106.0		
16"	153.0	77.0	123.0		
18"	173.0	87.0	138.0		
20"	194.0	96.0	154.0		
24"	230.0	115.0	171.0		

TABLE 2

LINE SIZE	FLANGE OUTSIDE DIAMETER					
	600#	900#	1500#	2500#		
2"	6.50	8.50	8.50	9.25		
2-1/2"	7.50	9.62	9.62	10.50		
3"	8.25	9.50	10.50	12.00		
4"	10.75	11.50	12.25	14.00		
6"	14.00	15.00	15.50	19.00		
8"	16.50	18.50	19.00	21.75		
10"	20.00	21.50	23.00	26.50		
12"	22.00	24.00	26.50	30.00		
14"	23.75	25.25	29.50			
16"	27.00	27.75	32.50			
18"	29.25	31.00	36.00			
20"	32.00	33.75	38.75			
24"	37.00	41.00	46.00			

TABLE 3


TEMP. TAP SIZE	FLANGED TEMPERATURE TAP HEIGHT (TTH)				
	600#	900/1500#	2500#		
1"	3.88	4.32	5.38		
1-1/2"	4.44	4.94	6.76		
2"	4.75	5.88	7.56		


ROSEMOUNT®

BOULDER, COLORADO


SIZE A FSCM.NO. DRAWING NO. 01497-1002


SCALE: NONE WT. SHEET 2 OF 11

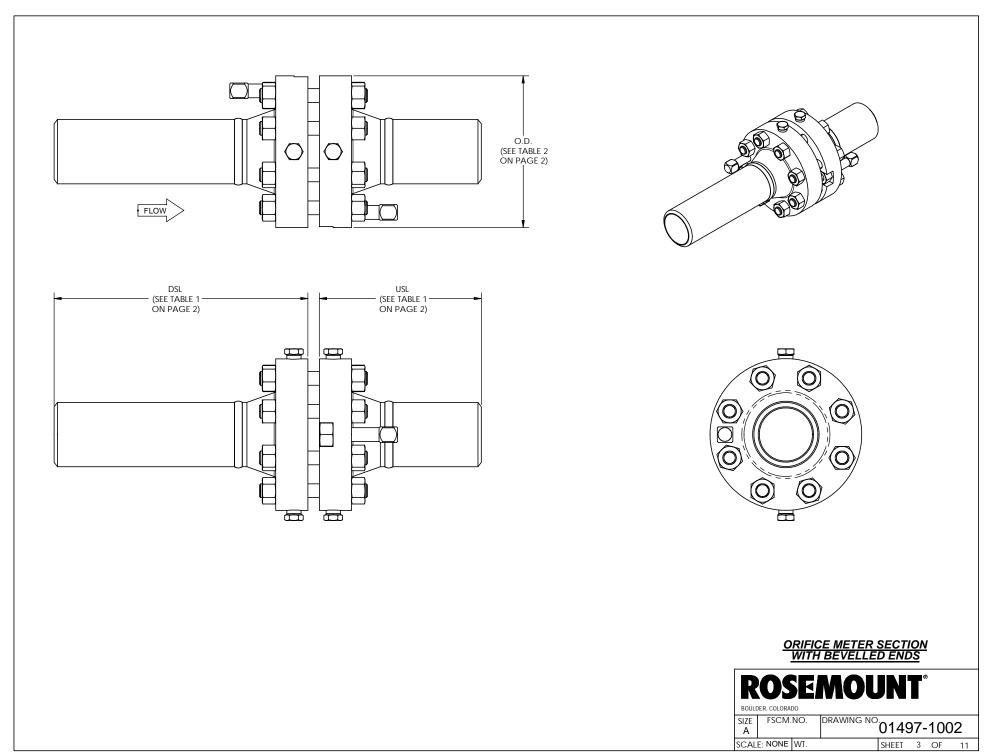

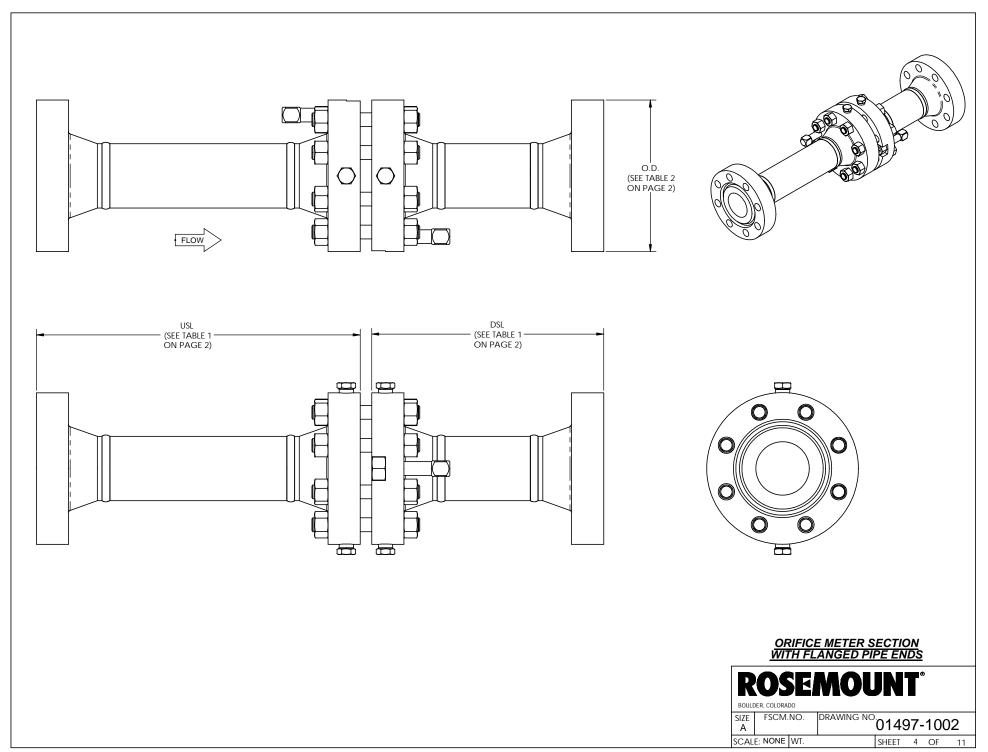



Electronic Master – PRINTED COPIES ARE UNCONTROLLED – Rosemount Proprietary

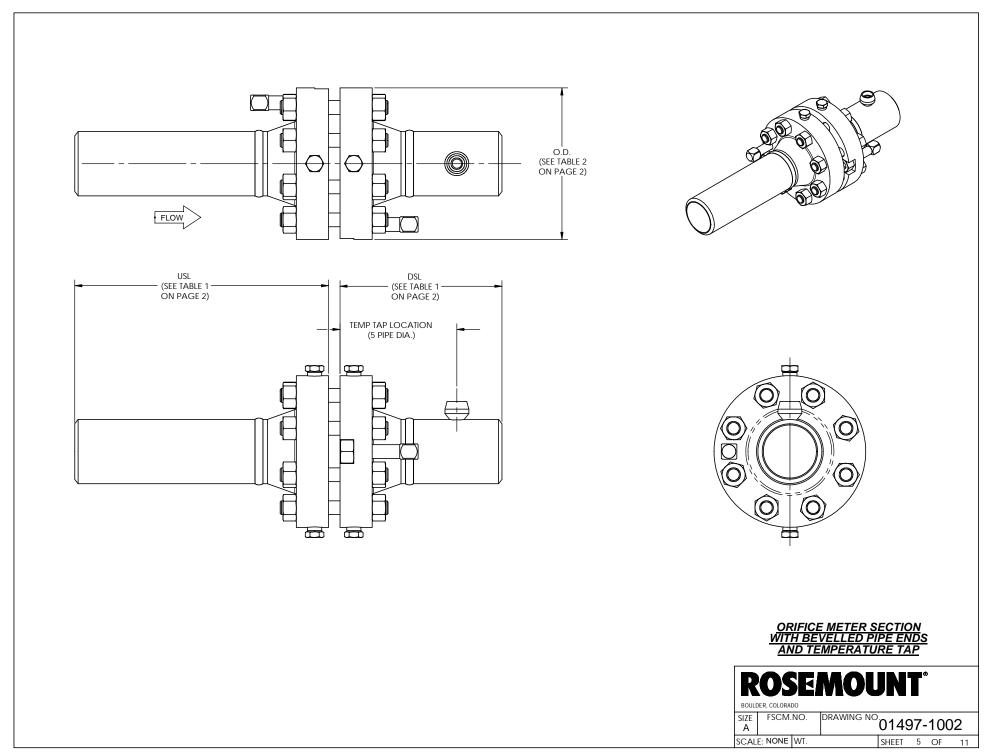

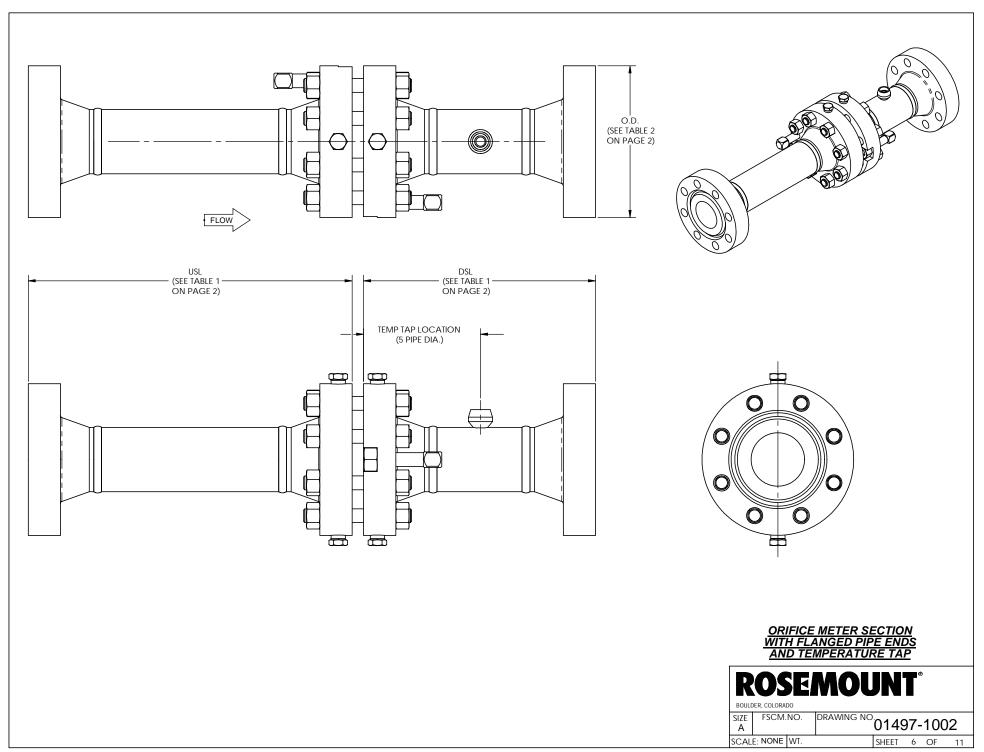

Electronic Master – PRINTED COPIES ARE UNCONTROLLED – Rosemount Proprietary

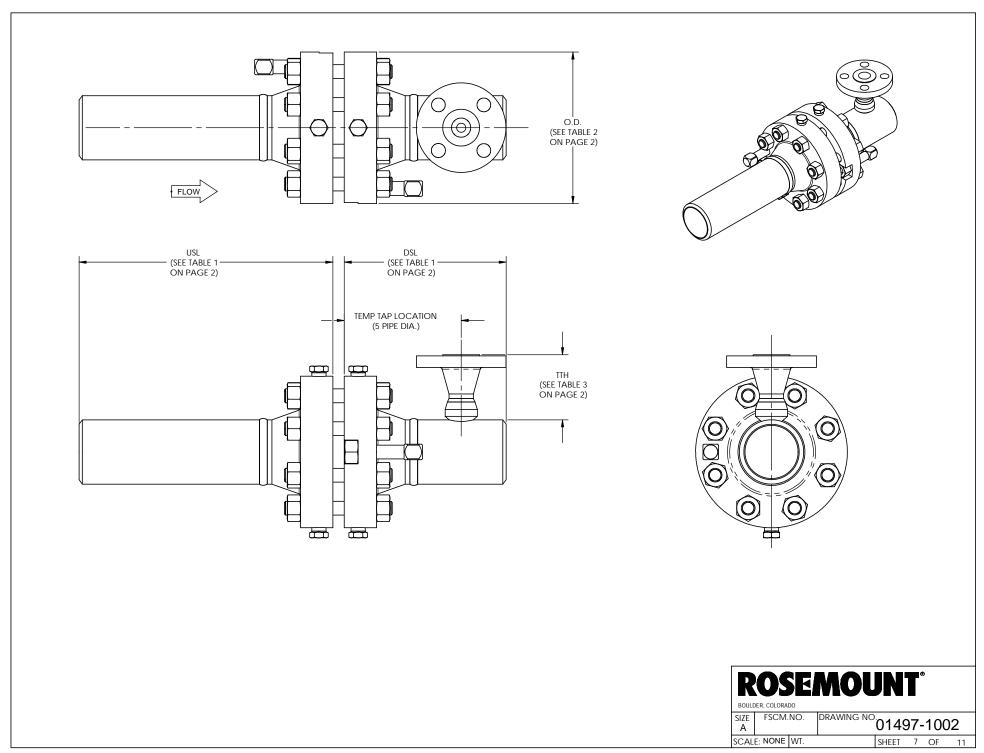

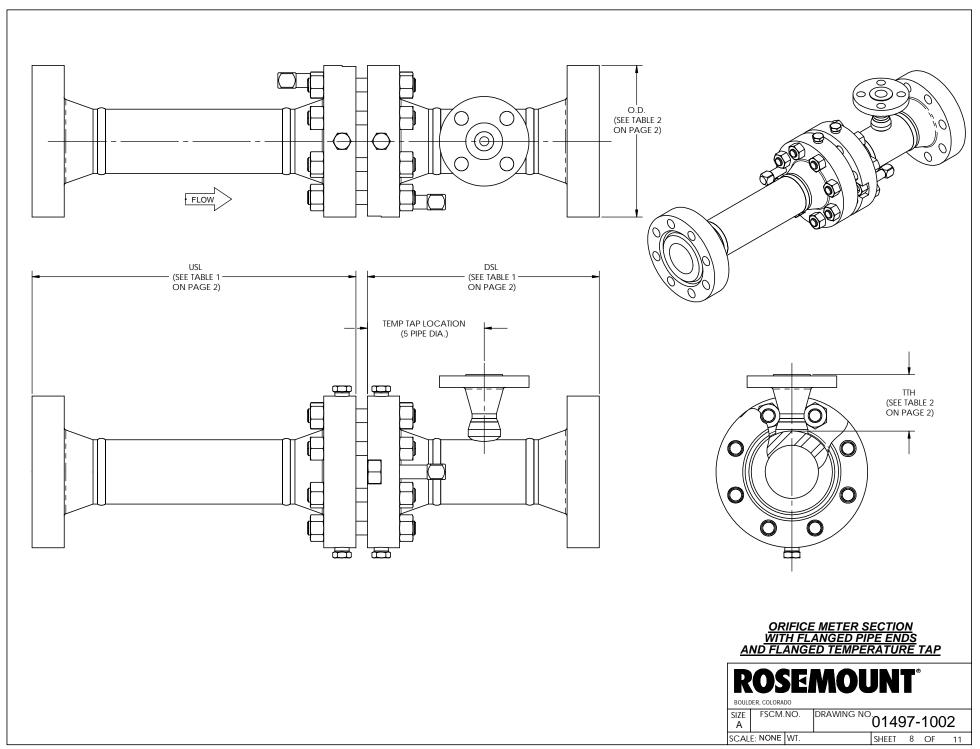

Electronic Master – PRINTED COPIES ARE UNCONTROLLED – Rosemount Proprietary

